


8mA22475

Dimming Option

(Valid with the "C" jumper removed)

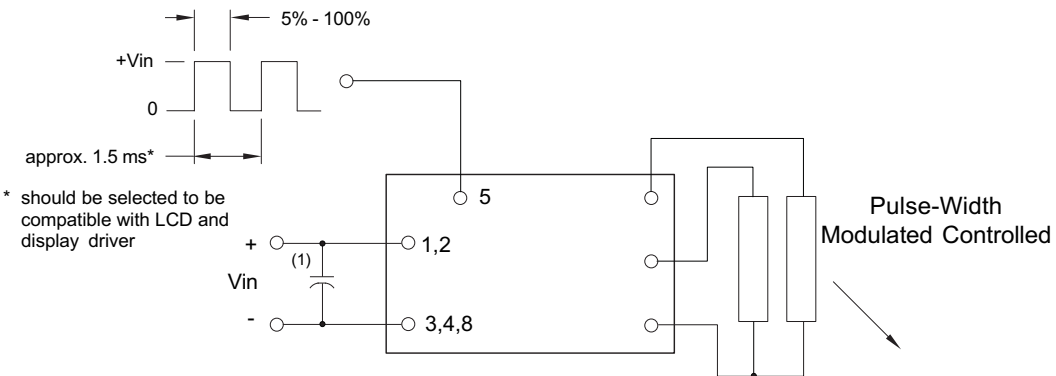

* should be selected to be compatible with LCD and display driver

Note 1 Input by-pass capacitor (25 uf - 100uf) may be required to reduce reflected ripple.



Endicott Research Group, Inc.


2601 Wayne St., Endicott NY 13760

607-754-9187 Fax 607-754-9255

<http://www.ergpower.com>

8mA22475

8m Class
DC to AC Inverter

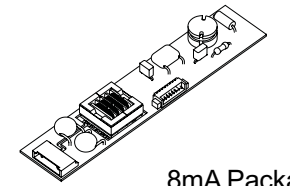

8mA Package

Specifications and Applications Information

11/15/00


Preliminary

The ERG 8mA22475 (8m Class) low profile dc to ac inverter is specifically designed to power the NEC NL6448AC33-18 LCD display module to a moderate brightness level from a +24 volt dc source.

This low profile inverter features:

- ✓ Less Than 8 mm in Height
- ✓ LCD Module Specific
- ✓ Display Compatible Output Connector
- ✓ Firm Specifications
- ✓ Application Information
- ✓ Designed, Manufactured and Supported in the USA
- ✓ Custom Input and Output Voltages
- ✓ Flexible System Interface
- ✓ Notebook Display Head Compatible

Package Configuration

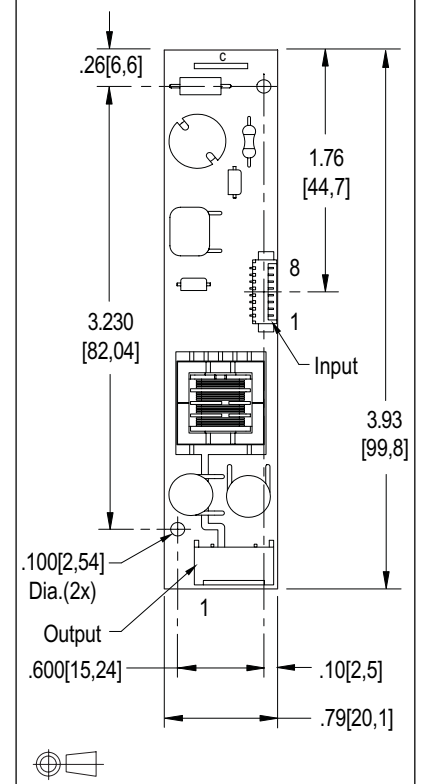

Pin Descriptions

Input Connector Molex 532-61-0890	Output Connector JST SM03(4.0)B-BHS-1-TB
Con1-1 Vin(+)	Con2-1 Common
Con1-2 Vin(+)	Con2-2 ACout
Con1-3 GND	Con2-3 ACout
Con1-4 GND	
Con1-5 Control	
Con1-6 NC	
Con1-7 NC	
Con1-8 GND	



Endicott Research Group, Inc.

2601 Wayne St., Endicott NY 13760

607-754-9187

8mA22475

Absolute Maximum Ratings

Rating	Symbol	Value	Units
Input Voltage Range	V _{in}	-0.3 to +26.4	Vdc
Operating Temperature	T _o	-0 to +70	°C
Storage Temperature	T _{stg}	-40 to +85	°C

Recommended Operating Conditions

Rating	Symbol	Value	Units
Input Voltage	V _{in}	+18 to 26.4	Vdc

Electrical Characteristics

Unless otherwise noted V_{in} = 24.00 Volts dc and T_a = 25 °C

Characteristic	Symbol	Min	Typ	Max	Units
Input Current	I _{in}	-	0.26	0.30	A _{dc}
Operating Frequency	F _o	37	42	47	KHz
Minimum Output Voltage	V _{out} (min)	1250	-	-	V _{rms}
Efficiency	η	-	85	-	%
Output Current per tube	I _{out}	-	5.2	-	ma _{rms}
Output Voltage (When powering a load simulating the referenced display)	V _{out}	-	510	-	V _{rms}
Pin5 Input Current Requirement	-	-	3	-	ma _{dc}

After tube has been allowed to warm-up for 5 minutes
External Disable Circuit shown on page 3.

Specifications subject to change without notice.







Endicott Research Group, Inc.


Made in USA

Typical Performance Curves

8mA22475

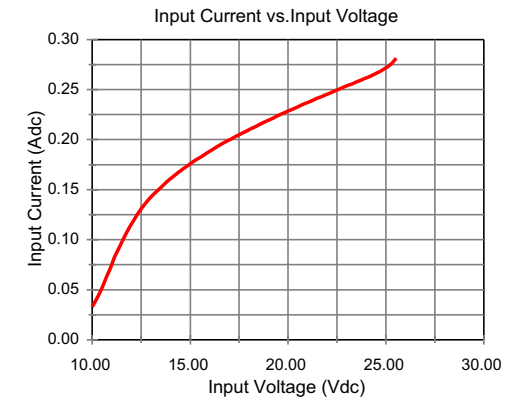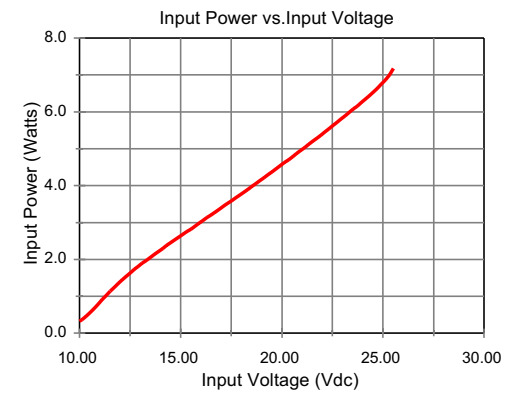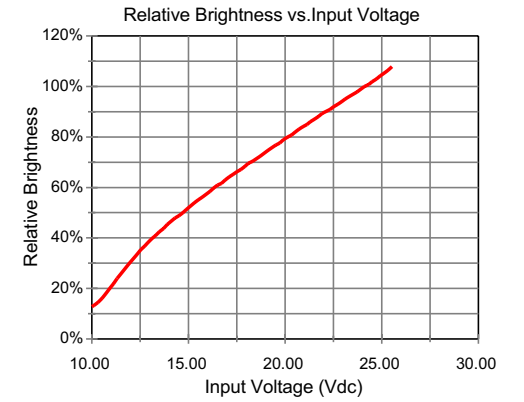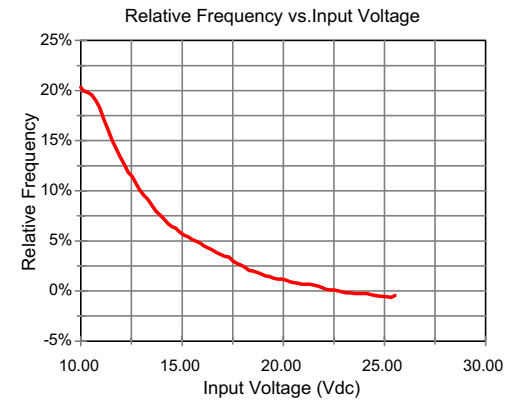

Disable Circuit

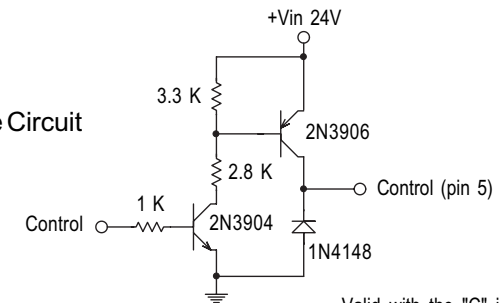

Valid with the "C" jumper removed



Endicott Research Group, Inc.