



Endicott Research Group, Inc.

2601 Wayne St., Endicott, NY 13760

607-754-9187 Fax 607-754-9255

http://www.ergpower.com

E1295

Specifications and Applications Information

04/13/11

The E1295 (E200II Series) dc to ac inverter is specifically designed to power the Sharp LM64P10 LCD display backlight to a moderate brightness level from a nominal +5 Volt dc source.

The E1295's small size, encapsulated package and low input power requirements (typically 2.1 Watts) make it the ideal power source for battery applications where small size, high efficiency and reliability are critical.

This standard inverter is designed to satisfy the most common cold-cathode lighting requirements for the LM64P10 display. Custom units, providing different inputs, outputs or package refinements are available.



Made in U.S.A.

Single Lamp DC to AC Inverter



E200II Package


Package Configuration

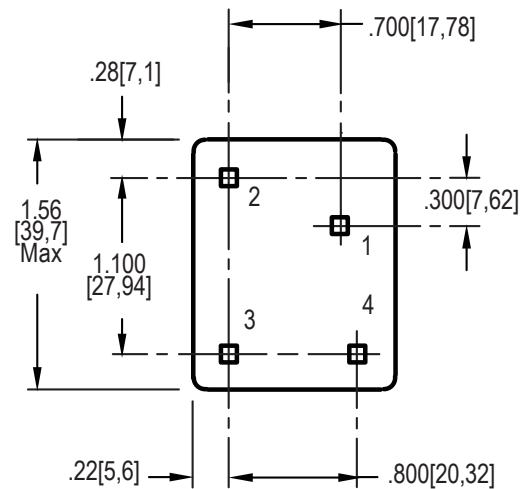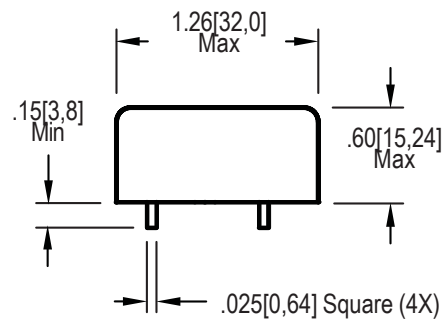

1. +Vin
2. GND
3. ACreturn
4. ACout



Connection Diagram

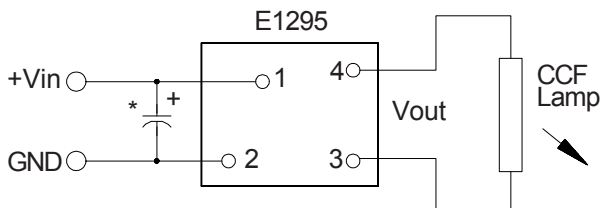

* Low ESR type input by-pass capacitor (22 uF - 100 uF) may be required to reduce reflected ripple.



Absolute Maximum Ratings

Rating	Symbol	Value	Units
Input Voltage Range	V_{in}	-0.3 to +5.5	Vdc
Storage Temperature	T_{stg}	-40 to +85	°C

Operating Characteristics

With the referenced display and lamp warm-up of 5 minutes.
 Unless otherwise noted $V_{in} = 5.00$ Volts dc and $T_a = 25^{\circ}C$.

Characteristic	Symbol	Min	Typ	Max	Units
Input Voltage	V_{in}	+4.50	+5.00	+5.25	Vdc
Component surface Temperature (note 1)	T_s	-20	-	+80	°C
Input Current (note 2)	I_{in}	-	0.42	0.52	Adc
Operating Frequency	F_o	25	30	35	kHz
Minimum Output Voltage (note 3)	$V_{out} (min)$	1100	-	-	Vrms
Efficiency	η	-	85	-	%
Output Current (per lamp)	I_{out}	-	5.0	-	mArms
Output Voltage (note 4)	V_{out}	-	280	-	Vrms

Specifications subject to change without notice.

(Note 1) Surface temperature must not exceed 80 degrees C; thermal management actions may be required.

(Note 2) Input current in excess of maximum may indicate a load/inverter mismatch condition, which can result in reduced reliability. Please contact ERG technical support.

(Note 3) Provided data is not tested but guaranteed by design.

(Note 4) Actual lamp voltage is approximately 300 Vrms after 5 minutes warm-up.

Application Notes:

- 1) Printed circuit boards to be free of traces beneath the inverter.
- 2) The minimum distance from high voltage areas of the inverter to any conductive material should be .12 inches per kilovolt of starting voltage.
- 3) ACreturn should be left floating, not grounded.
- 4) Contact ERG for possible exceptions.



Endicott Research Group, Inc. (ERG) reserves the right to make changes in circuit design and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that data sheets are current before placing orders. Information furnished by ERG is believed to be accurate and reliable. However, no responsibility is assumed by ERG for its use.