


REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	0	RELEASED	07/24/07	CC
	1	ADDED TOLERANCE TO "L"	06/26/08	CC

H10004xxx	"L" (length)
051	2"
076	3"
102	4"
127	5"
152	6"
229	9"
304	12"

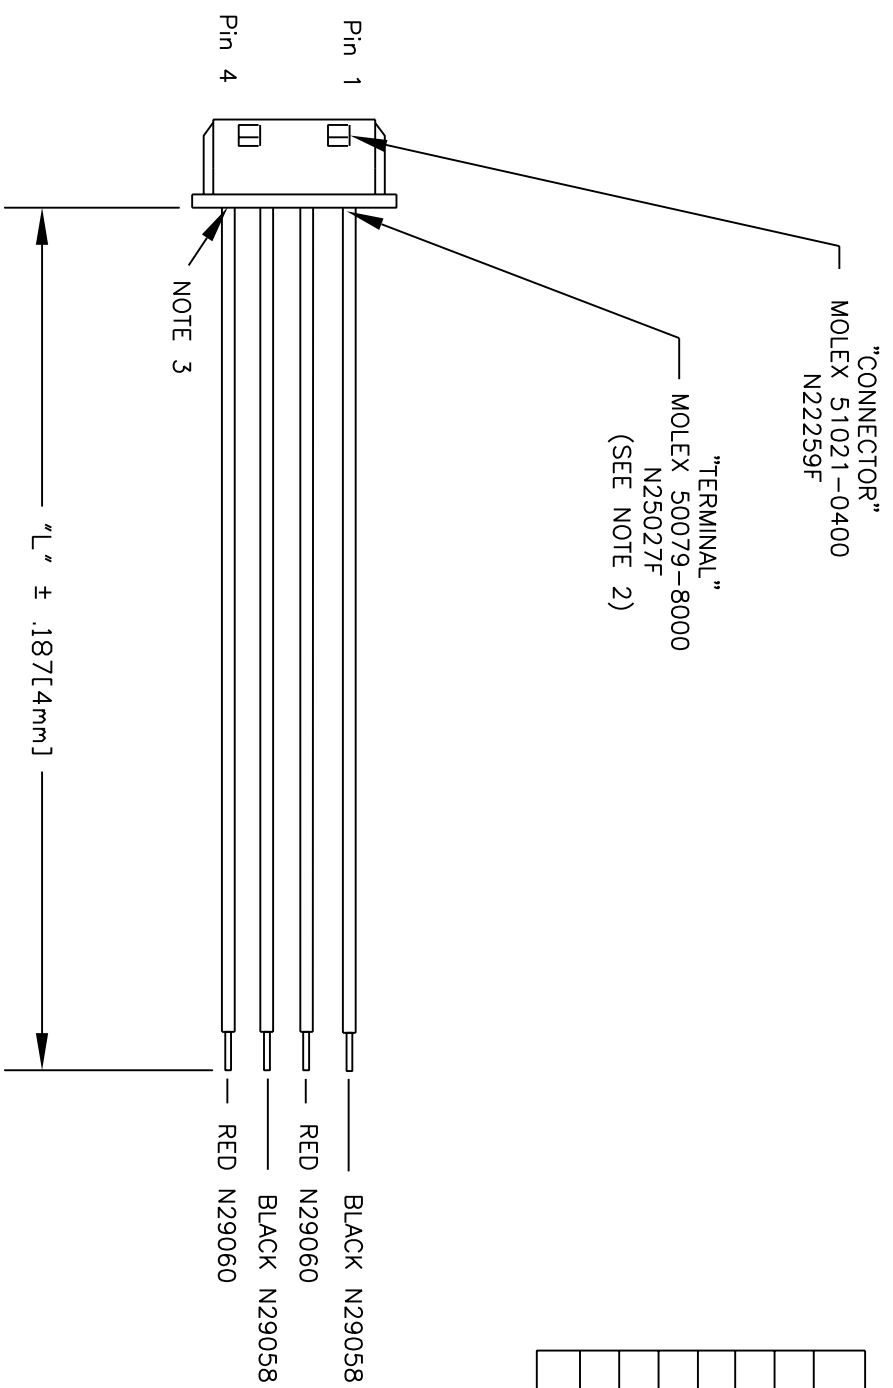

- NOTES:
1. ALL WIRING MUST HAVE A FLAMIBILITY RATING EQUIVALENT TO UL-94V1 AND AN APPROPRIATE UL STYLE NUMBER.
  2. CABLE INSULATION TO BE CAPTIVATED BY CRIMP TERMINAL, PER IPC/WHMA-A-620.
  3. CONNECTOR STRIP LENGTH IS 1.65 ± .25mm. OPEN STRIP LENGTH IS 2.0 ± .25mm.
  4. WIRES TO BE 26 AWG, IN COLORS LISTED.
  5. PLACE HARNESS ASSEMBLIES IN BAG CALLED OUT ON BOM. THEN MARK PART NUMBER AND QTY. ON BAG WITH PERMANENT MARKER.

MATERIAL		APPROVALS		DATE	
FINISH		CC	CC	07/09/07	07/09/07
DO NOT SCALE		CC	CC	07/09/07	07/09/07
DRAWING NUMBER		<b>ENDICOTT RESEARCH GROUP, INC.</b> 2601 WAYNE ST., ENDICOTT, NY 13760 607-754-9187			
SCALE		<b>WIRING HARNESS</b> H10004			
SHEET		DRAWING NUMBER		REV.	
1 OF 1		H10004		1	