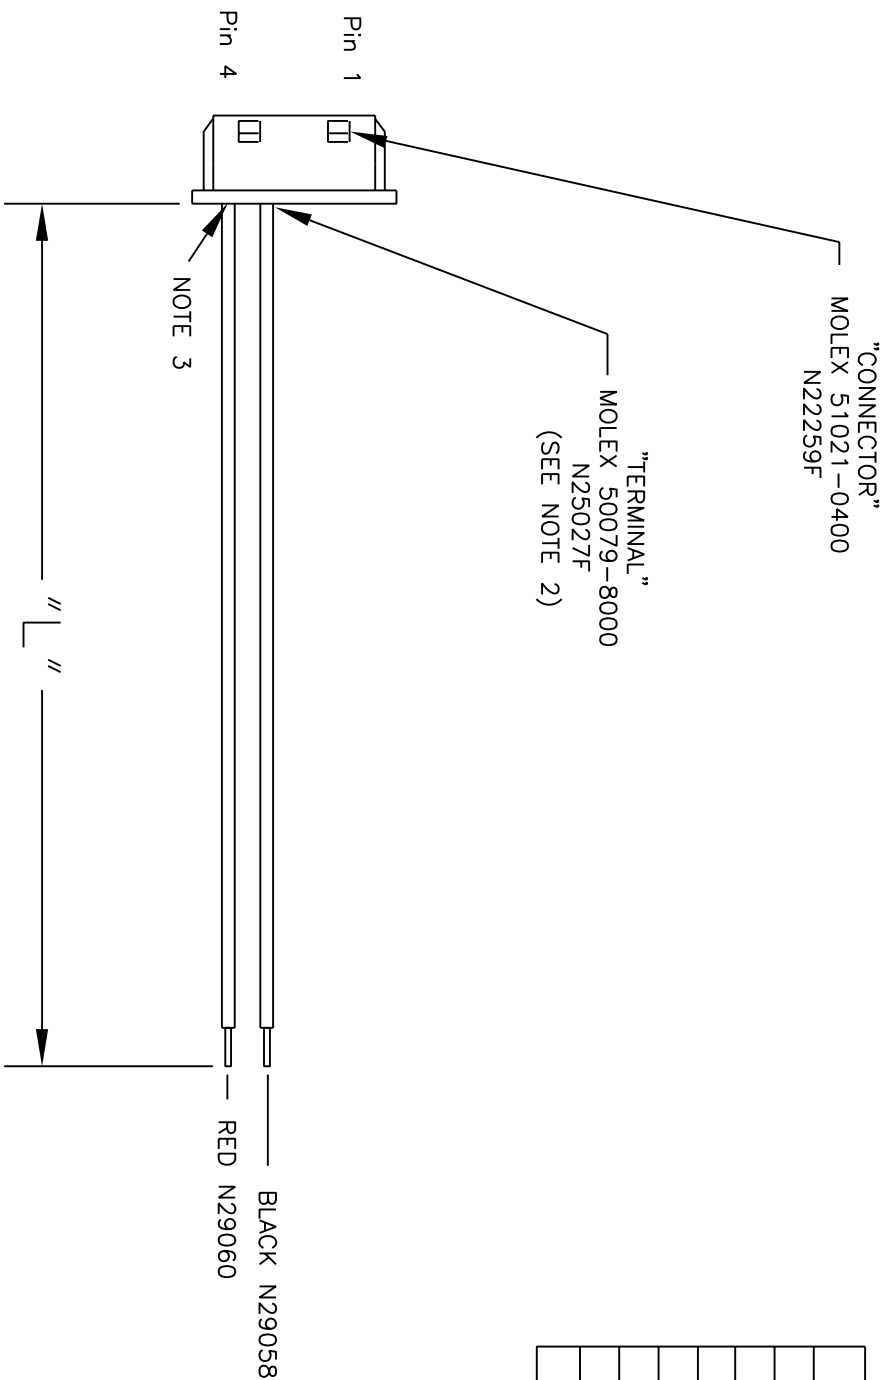





REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	0	RELEASED	09/01/07	cc


H10202xxx	"L" (length)
051	2"
076	3"
102	4"
127	5"
152	6"
229	9"
304	12"



NOTES:

1. ALL WIRING MUST HAVE A FLAMIBILITY RATING EQUIVALENT TO UL-94V1 AND AN APPROPRIATE UL STYLE NUMBER.
2. CABLE INSULATION TO BE CAPTIVATED BY CRIMP TERMINAL, PER IPC/WHMA-A-620.
3. WIRE STRIP LENGTH IS 1.65 ± .25mm.
4. WIRES TO BE 26 AWG, IN COLORS LISTED.
5. PLACE HARNESS ASSEMBLIES IN BAG CALLED OUT ON BOM. THEN MARK PART NUMBER AND QTY. ON BAG WITH PERMANENT MARKER.

					
MATERIAL		DRAWN		APPROVALS	
FINISH		CHECKED		DATE	
DO NOT SCALE		APPROVED		02/09/07	
SCALE		DRAWING NUMBER		REV.	
C		H10202		0	
SHEET		1 OF		1	


**ENDICOTT RESEARCH GROUP, INC.**  
 2601 WAYNE ST., ENDICOTT, NY 13760 607-754-9187  
**WIRING HARNESS**  
 H10202