


REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	0	RELEASED	10/26/01	CC
	1	RELEASED	09/07/05	CC
	2	ADDED BAG FOR ASSEMBLIES	04/09/07	CC
	3	ADDED TOLERANCE TO "L"	10/02/09	CC

H1308XXX	"L" (length)
460	18"

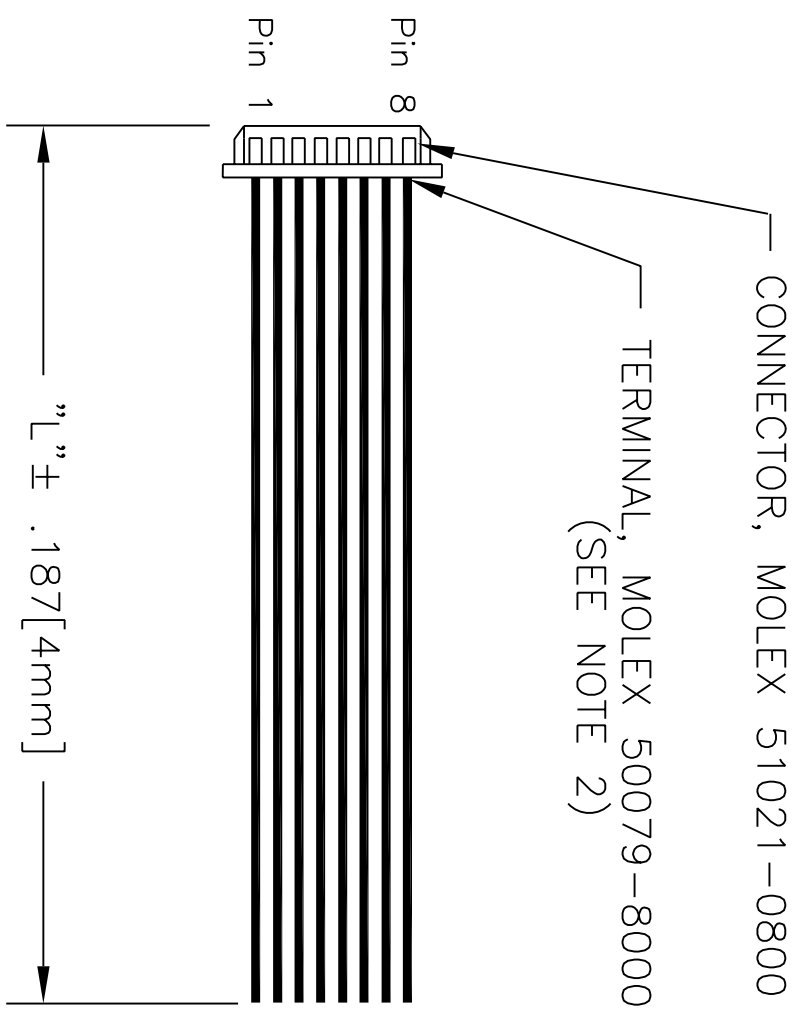

- NOTES:
1. ALL WIRING MUST HAVE A FLAMMABILITY RATING EQUIVALENT TO UL-94V1 AND AN APPROPRIATE UL STYLE NUMBER
  2. CABLE INSULATION TO BE CAPTIVATED BY CRIMP TERMINAL, PER IPC/WHMA-A-620
  3. WIRES TO BE 26 AWG IN COLORS LISTED.

MATERIAL		APPROVALS		DATE		 <b>ENDICOTT RESEARCH GROUP, INC.</b> 2601 WAHNE ST., ENDICOTT, NY 13760 607-754-9187	
FINISH		DRAWN	CC	10/26/01	<b>WIRING HARNESS</b> H1308		
DO NOT SCALE		CHECKED	CC	10/26/01	C DRAWING NUMBER H1308		REV. 3
		APPROVED	CC	10/26/01	SCALE		SHEET 1 OF 1