


REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	0	RELEASED	04/20/10	CC

H14512xxx	"L" (length)
051	2"
076	3"
102	4"
127	5"
152	6"
229	9"
304	12"

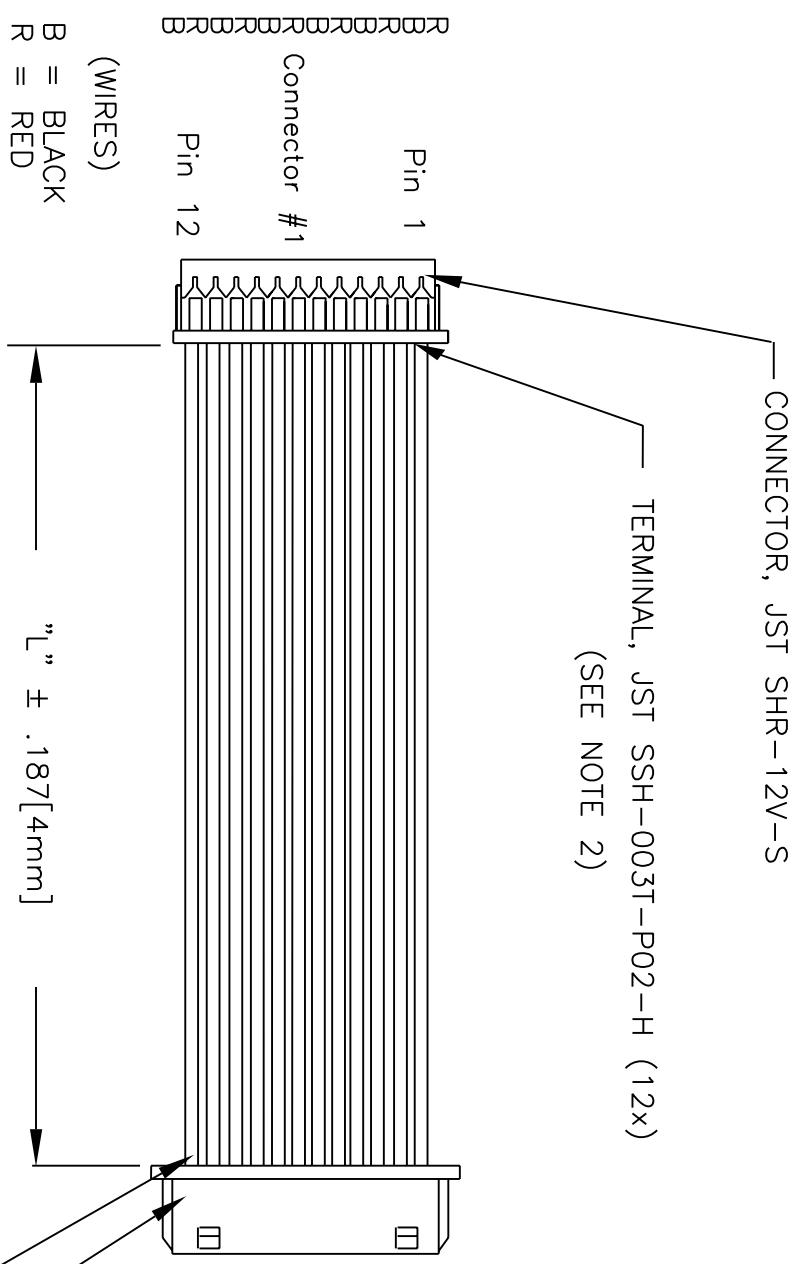

Pin Outs			
Pin 12	Pin 1		
Pin 11	Pin 2		
Pin 10	Pin 3		
Pin 9	Pin 4		
Pin 8	Pin 5		
Pin 7	Pin 6		
Pin 6	Pin 7		
Pin 5	Pin 8		
Pin 4	Pin 9		
Pin 3	Pin 10		
Pin 2	Pin 11		
Pin 1	Pin 12		

NOTES:

1. ALL WIRING MUST HAVE A FLAMMABILITY RATING EQUIVALENT TO UL-94V1 AND AN APPROPRIATE UL STYLE NUMBER
2. CABLE INSULATION TO BE CAPTIVATED BY CRIMP TERMINAL PER IPC/WHMA-A-620.
3. WIRES TO BE 28 AWG PVC - UL1571 IN COLORS LISTED.

DRAWN		DATE		 ENDICOTT RESEARCH GROUP, INC. 2601 WAYNE ST., ENDICOTT, NY 13760 607-754-9187
CHECKED		DATE		
APPROVED		DATE		
MATERIAL		DRAWING NUMBER		REV.
FINISH		SCALE		0
DO NOT SCALE		SHEET		1 OF 1

WIRING HARNESS
H14512