


REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
0		RELEASED	03/16/11	CC

H15906xxx	"L" (length)
102	4"
127	5"
152	6"
229	9"
304	12"

PIN OUTS		
Conn #1	Conn #2	
Pin 1	Pin 2	
Pin 2	Pin 10	
Pin 3	Pin 6	
Pin 4	Pin 5	
Pin 5	Pin 9	
Pin 6	Pin 1	

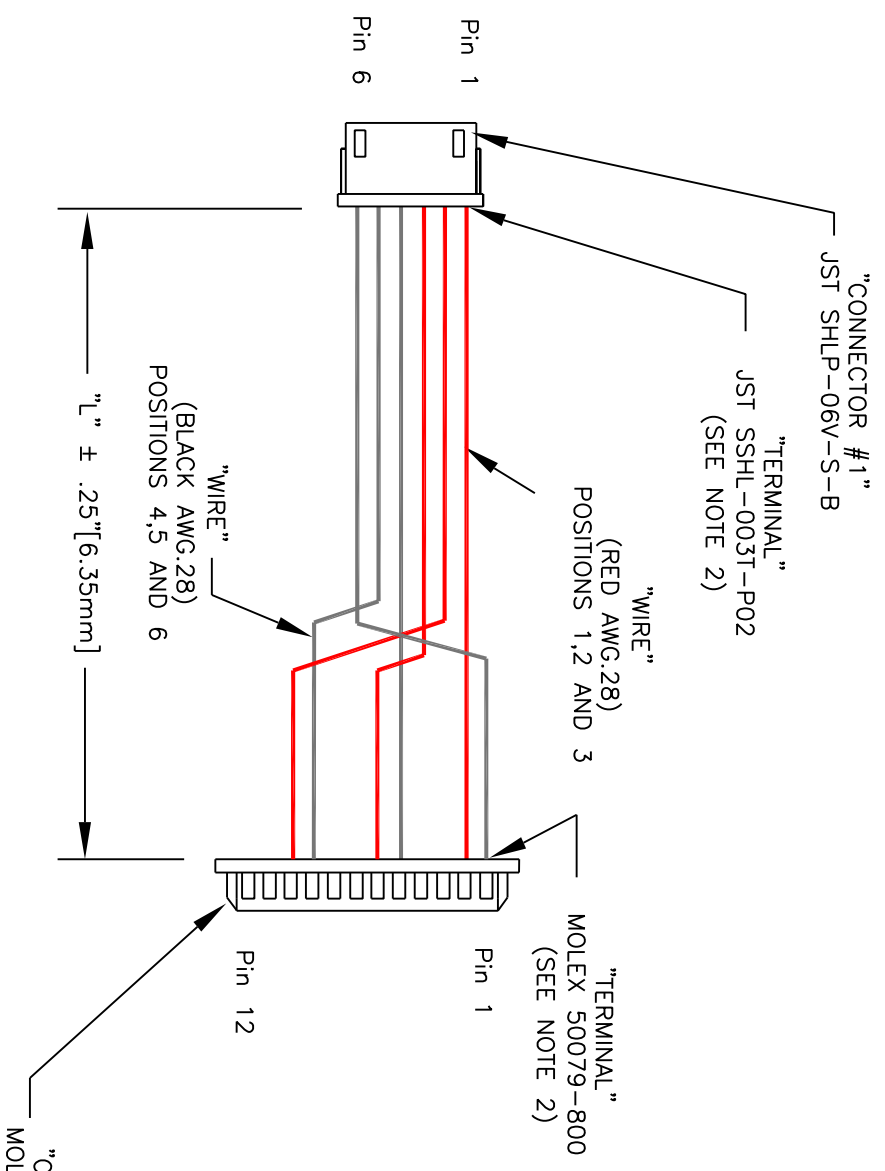

NOTES:

1. ALL WIRING MUST HAVE A FLAMABILITY RATING EQUIVALENT TO UL-94V1.
2. CABLE INSULATION TO BE CAPTIVATED BY CRIMP TERMINAL PER IPC/WHMA-A-620.
3. WIRES TO BE 28 AWG, IN COLORS LISTED IN BOM.

MATERIAL		APPROVALS		DATE		<p>ERG ENDICOTT RESEARCH GROUP, INC. 2601 WAYNE ST., ENDICOTT, NY 13760 807-754-9187</p>
FINISH		CC	CC	11/26/08	11/26/08	
DO NOT SCALE		CC	CC	11/26/08	11/26/08	
LED TEST FIXTURE HARNESS			DRAWING NUMBER			REV.
H15906			H15906			0
SCALE			SHEET			1 OF 1