


REVISIONS			
ZONE	REV.	DATE	APPROVED
	0	05/13/13	CC

H18406XXX	"L" (length)
152	6"

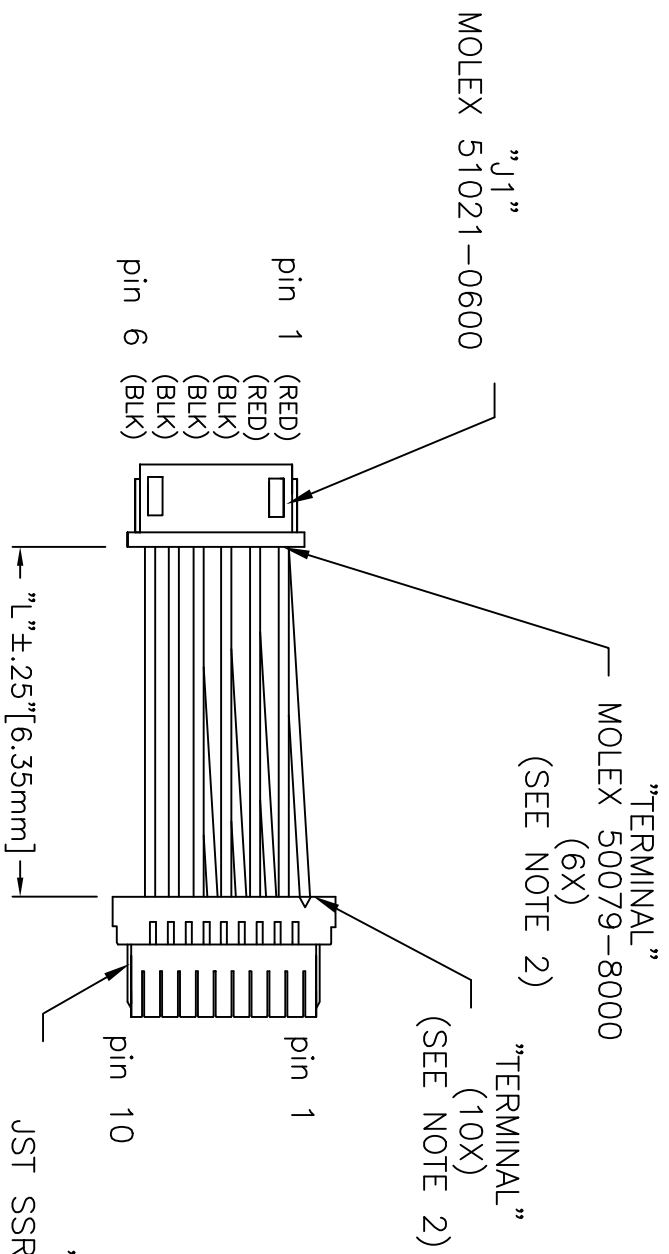

Pin Outs	
J1	J2
Pin 1	Pin 1,2
Pin 2	Pin 3,4
Pin 3	Pin 5,6
Pin 4	Pin 7,8
Pin 5	Pin 9
Pin 6	Pin 10

- NOTE:
1. WIRES TO BE #26 AWG MIL STD W16878 TYPE B (BELDEN #8504 OR EQUIVALENT) IN COLORS AND LENGTHS LISTED.
  2. CABLE INSULATION TO BE CAPTIVATED BY CRIMP TERMINAL, PER IPC/WHMA-A-620.
  3. WIRES COLORS ARE LISTED IN ().

TOLERANCES		USED ON	
FRACTION ± 1/8	APPROVALS	DATE	
2 PL. DEC. ± .01	DRAWN CC	05/13/13	
3 PL. DEC. ± .005	CHECKED BA	05/13/13	
MATERIAL	APPROVED BA	05/13/13	
FINISH			
DO NOT SCALE			

<b>ENDICOTT RESEARCH GROUP, INC.</b> 2601 WAYNE ST., ENDICOTT, NY 13760 607-754-9187	
TITLE	WIRING HARNESS
P/M	H18406152F
SCALE	C DRAWING NUMBER H18406152F
SHEET	1 OF 1
REV.	0