


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	0	RELEASED	04/19/12	cc

H19704xxxxF	"L" (length)
051	2"
076	3"
102	4"
127	5"
152	6"
229	9"
304	12"

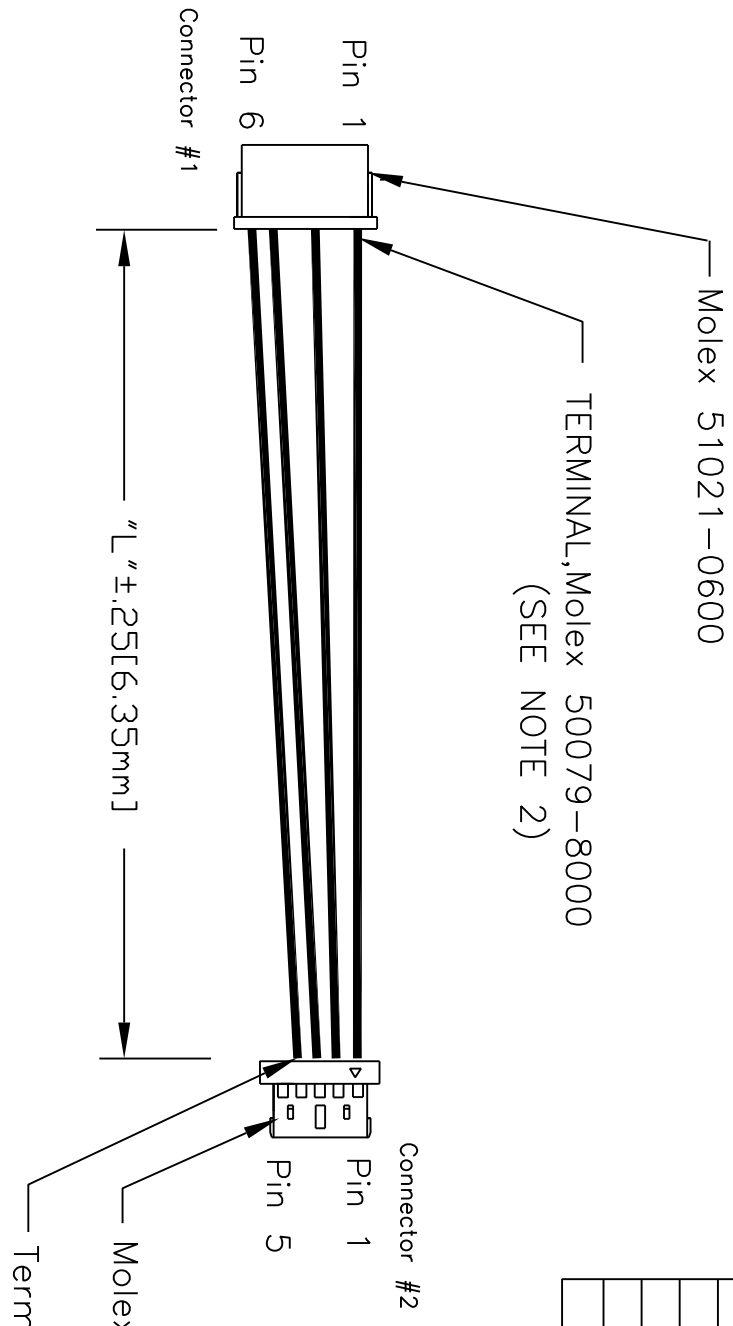

Pin Outs	
#1	#2
Pin 1	Pin 1
Pin 2	Pin 2
Pin 3	Pin 2
Pin 4	Pin 3
Pin 5	Pin 4
Pin 6	Pin 5

(SEE NOTE 2)
Terminal, Molex 50641-8041

NOTES:

1. ALL WIRING MUST HAVE A FLAMMABILITY RATING EQUIVALENT TO UL-94V1 AND AN APPROPRIATE UL STYLE NUMBER
2. CABLE INSULATION TO BE CAPTIVATED BY CRIMP TERMINAL PER IPC/WHMA-A-620.
3. WIRES TO BE 28 AWG POS 3,5 AND 6 IN COLOR WHITE.
4. WIRE TO BE 28 AWG POS 1 IN COLOR BLACK.

MATERIAL		APPROVALS		DATE		<p>ENDICOTT RESEARCH GROUP, INC. 2601 WAYNE ST., ENDICOTT, NY 13760 607-754-9187</p>
FINISH		CC	BA	11/25/13	11/25/13	
DO NOT SCALE		BA	BA	11/25/13	11/25/13	
DRAWING NUMBER			SCALE			<p>WIRING HARNESS H19704F</p>
H19704F			C			
SHEET 1 OF 1			REV 0			