



REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	0	RELEASED	10/30/01	CC
	1	Removed ink color	03/17/05	CC

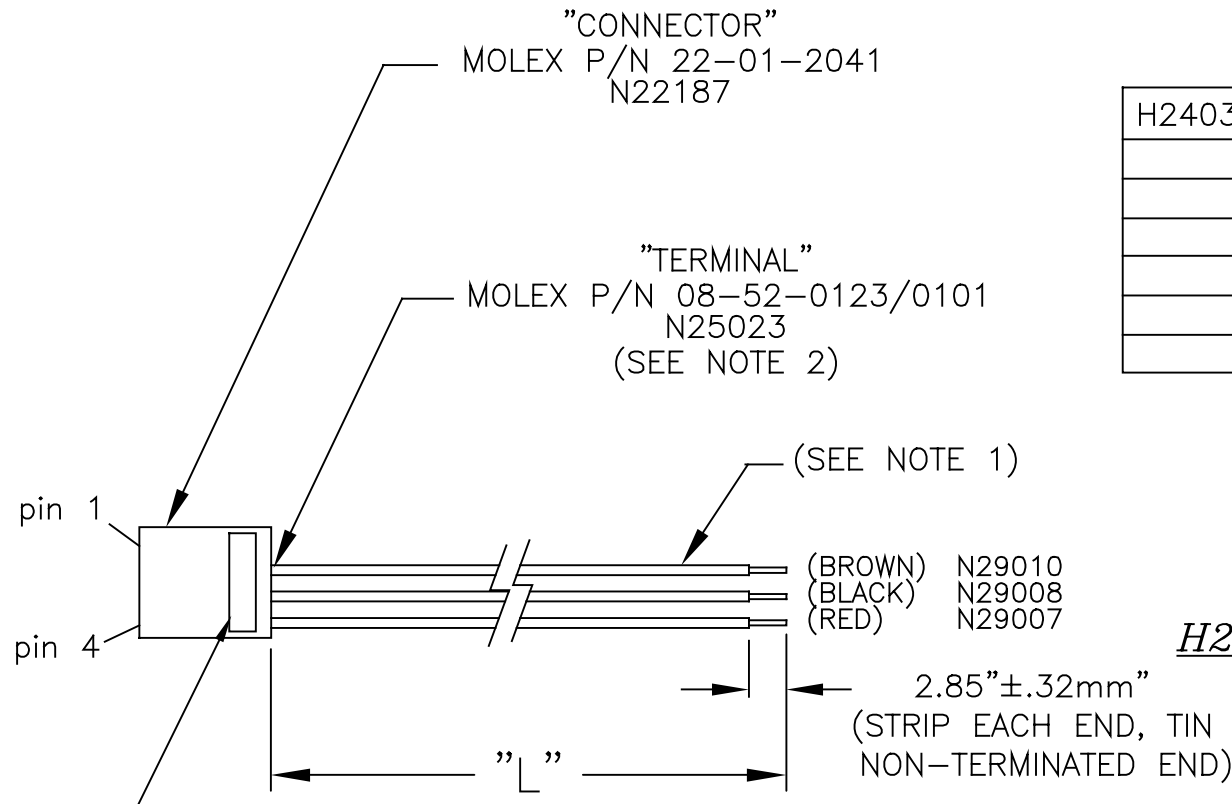

H2403XXX	"L" (length)	Cut/Strip Length
076	3"	084mm
152	6"	160mm
229	9"	237mm
305	12"	313mm
457	18"	465mm
610	24"	618mm

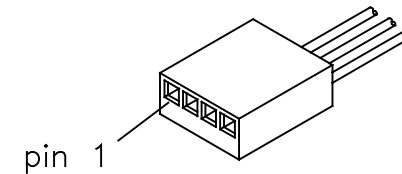

H2403 OPTION NON-LOCKING
(NO LOCK OR ALIGNMENT RIBS)

(SEE NOTE 4)

- NOTE:
1. WIRES TO BE 24 AWG, MIL STD W16878 TYPE B (BELDEN #8504 OR EQUIVELANT) IN THE COLORS LISTED.
 2. CABLE INSULATION TO BE CAPTIVATED BY CRIMP TERMINAL, SEE ATTACHED DRAWINGS FOR ACCEPTABILITY.
 3. CONNECTOR POSITIONS 2-4 ARE POPULATED, POSITION 1 IS NOT POPULATED.
 4. STAMP P/N IN LOCATION INDICATED. USING 6 PITCH.

TOLERANCES		USED ON 8M PRODUCTS		ENDICOTT RESEARCH GROUP, INC.	
FRACTION	± 1/16	APPROVALS		2601 WAYNE ST., ENDICOTT, NY 13760 607-754-9187	
2 PL. DEC.	±.01	DRAWN	CC	DATE	10/30/01
3 PL. DEC.	±.005	CHECKED	CC	DATE	10/30/01
MATERIAL		APPROVED	CC	TITLE	WIRING HARNESS
FINISH		DO NOT SCALE		P/N	H2403
				DRAWING NUMBER	H2403
				REV.	1
				SCALE	SHEET 1 OF 1