



Endicott Research Group, Inc.

2601 Wayne St., Endicott, NY 13760
607-754-9187 Fax 607-754-9255
<http://www.ergpower.com>

E3288

Specifications and Applications Information

01/26/05


Preliminary

The E3288 (E200II Series) dc to ac inverter is specifically designed to power the AU Optronics G084SN05 display to a moderate brightness level from a +5 volt dc source.

The E3288's small size and encapsulated package makes it the ideal power source for applications where small size, high efficiency and reliability are critical.


This inverter is designed to satisfy the most common cold-cathode lighting requirements for the AU Optronics G084SN05 display. Custom units, providing different inputs, outputs or package refinements are available.

Connection Diagram

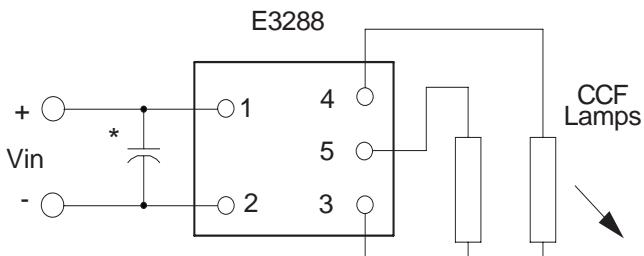



* Input bypass capacitor may be required (10uf - 100uf)

Two Tube DC to AC Inverter

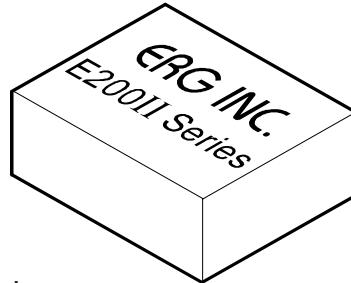

E200II Package

Package Configuration

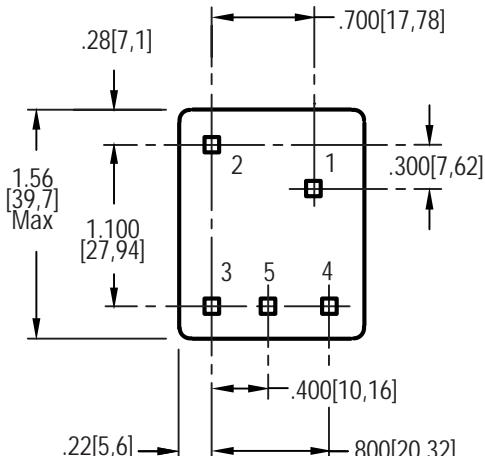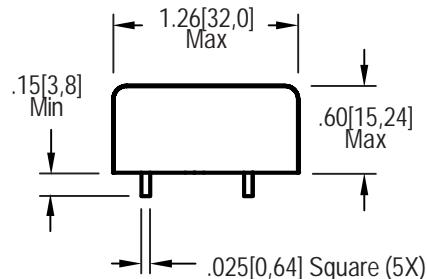

1. Vin(+)
2. Vin(-)
3. Common
4. Vout(AC)
5. Vout(AC)



Absolute Maximum Ratings

E3288

Rating	Symbol	Value	Units
Input Voltage Range	Vin	-0.3 to +6	Vdc
Operating Temperature	To	-0 to +70	°C
Storage Temperature	Tstg	-40 to +85	°C

Recommended Operating Conditions

Rating	Symbol	Value	Units
Input Voltage	Vin	+4.50 to 5.25	Vdc

Electrical Characteristics **

Unless otherwise noted Vin = 5.00 Volts dc and Ta = 25°C

Characteristic	Symbol	Min	Typ	Max	Units
Input Current	Iin	-	.98	1.1	Adc
Operating Frequency	Fo	29	34	38	KHz
Minimum Output Voltage	Vout (min)	1200	-	-	Vrms
Efficiency	-	-	81	-	%
Output Current per CCFL	Iout	-	6.0	-	marms
Output Voltage (When powering a Load simulating the refenced display)	Vout	-	330	-	Vrms

After lamp has be allowed to warm-up for 5 minutes

Specifications subject to change without notice.

** Includes External Diode.

Application Notes:

- 1) Printed circuit boards should be free of traces beneath the inverter.
- 2) The minimum distance from high voltage areas of the inverter to any conductive material should be .12 inches per kilovolt of starting voltage.
- 3) Contact ERG for possible exceptions.



Endicott Research Group, Inc.

2601 Wayne St., Endicott, NY 13760

607-754-9187 Fax 607-754-9255

<http://www.ergpower.com>

Made in U.S.A.

page 2 of 2.