


REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
0		RELEASED	04/26/02	CC

H3605XXX	"L" (length)	Cut/Strip Length
076	3"	084mm
152	6"	160mm
229/230	9"	237mm
240	9.5"	248mm
305	12"	313mm
457/460	18"	465mm
610	24"	618mm

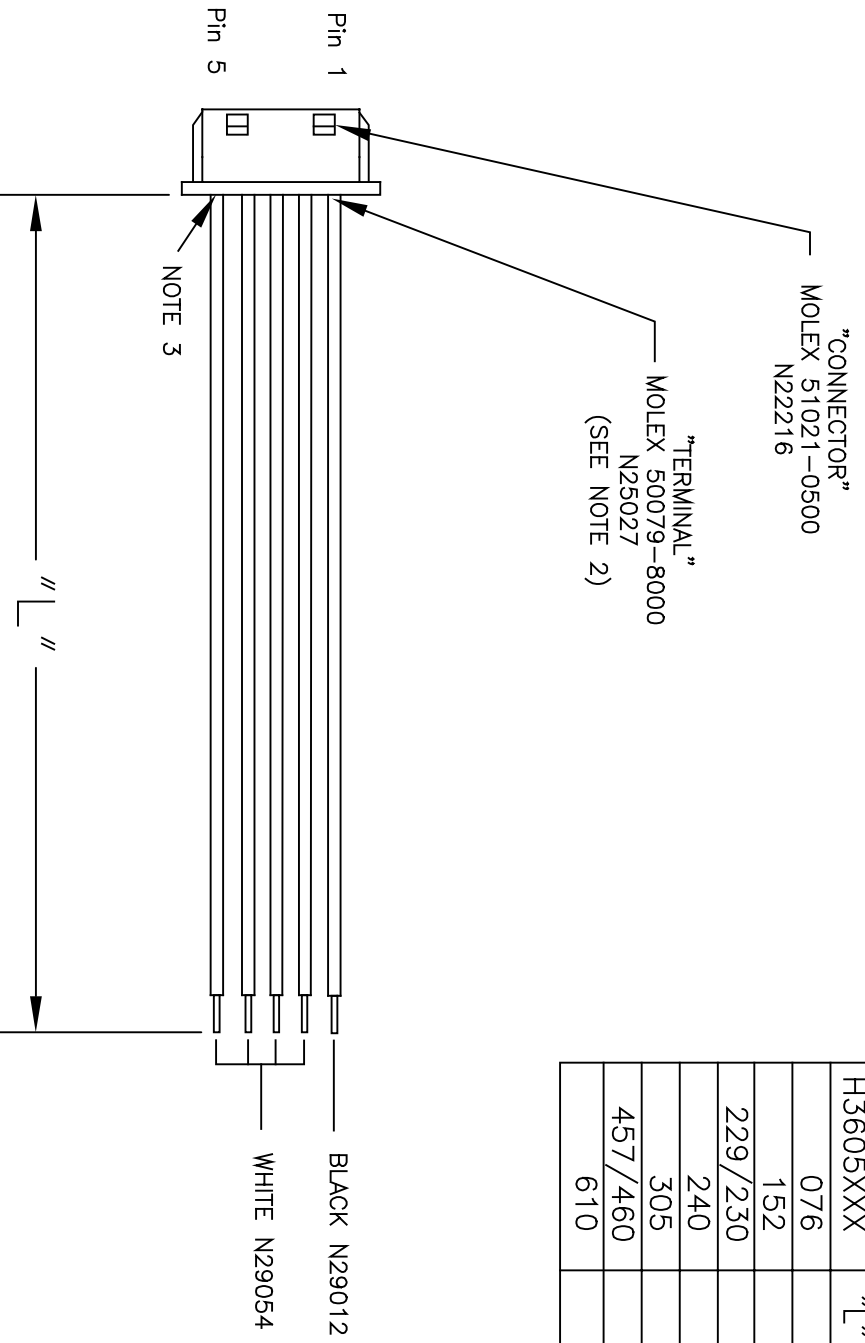

- NOTES:
1. ALL WIRING MUST HAVE A FLAMIBILITY RATING EQUIVALENT TO UL-94V1 AND AN APPROPRIATE UL STYLE NUMBER.
  2. CABLE INSULATION TO BE CAPTIVATED BY CRIMP TERMINAL, SEE ATTACHED DRAWINGS FOR ACCEPTABILITY.
  3. CONNECTOR N22216 WIRE STRIP LENGTH IS 1.65 ± .25mm.
  4. WIRES TO BE 26 AWG, MIL STD W16878 TYPE B (BELDEN #8504 OR EQUIVELANT) IN COLORS LISTED.
  5. USE CABLE TIE N22211 FOR EACH HARNESS. ATTACH TIE AND CLIP EXCESS FLUSH LEAVING NO SHARP EDGE.

MATERIAL	APPROVALS	DATE	<b>ENDICOTT RESEARCH GROUP, INC.</b> 2601 WAYNE ST., ENDICOTT, NY 13760 807-754-9187
	DRAWN CC	04/26/02	
FINISH	CHECKED CC	04/26/02	<b>WIRING HARNESS</b> H3605
	APPROVED CC	04/26/02	
DO NOT SCALE		SCALE	DRAWING NUMBER H3605 SHEET 1 OF 1