


L2374

Dimming Option

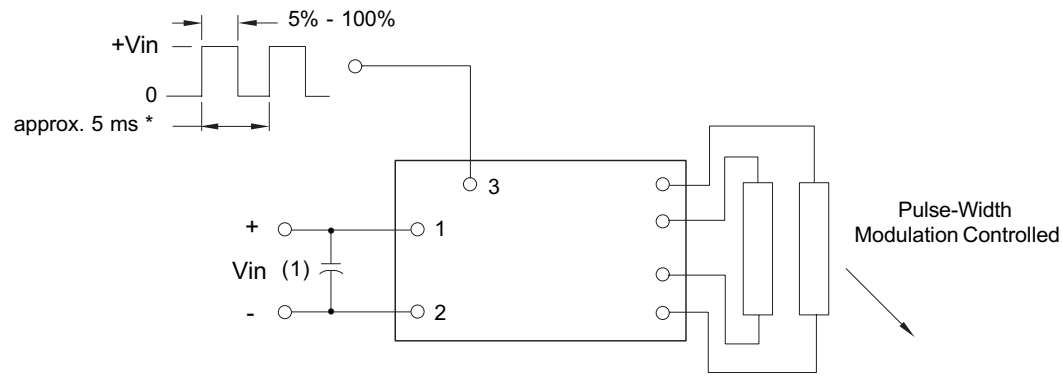

* should be selected to be compatible with LCD and display driver.

Note 1 Input by-pass capacitor (25uf - 100uf) may be required to reduce reflected ripple.



Endicott Research Group, Inc.
 2601 Wayne St., Endicott NY 13760
 607-754-9187



Endicott Research Group, Inc.
 2601 Wayne St., Endicott NY 13760
 607-754-9187 Fax 607-754-9255
<http://www.ergpower.com>

L2374

8m Class DC to AC Inverter

Specifications and Applications Information


10/31/00

Preliminary

The ERG L2374 (8m Class) low profile dc to ac inverter is specifically designed to power the Mitsubishi AA104VB04 LCD display module to a moderate brightness level from a +12 volt dc source.


This low profile inverter features:

- ✓ Less Than 8 mm in Height
- ✓ LCD Module Specific
- ✓ Display Compatible Output Connector
- ✓ Firm Specifications
- ✓ Application Information
- ✓ Designed, Manufactured and Supported in the USA
- ✓ Custom Input and Output Voltages
- ✓ Flexible System Interface
- ✓ Notebook Display Head Compatible



8m Package

Package Configuration

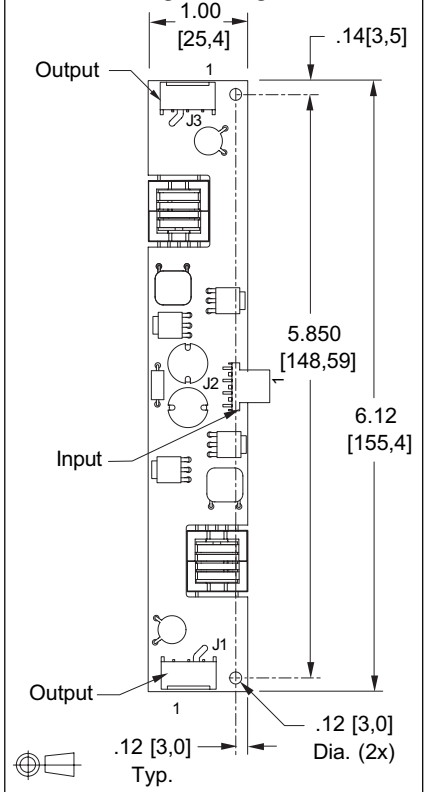

Pin Descriptions

Input Connector		Output Connectors	
MOLEX 22-05-3041		JST SM02(8.0)B-BHS1TB	
J2-1	Vin	J1-1	ACout
J2-2	GND	J1-2	NC
J2-3	Control	J1-3	ACcommon
J2-4	NC	J3-1	ACout
		J3-2	NC
		J3-3	ACcommon

L2374

Absolute Maximum Ratings

Rating	Symbol	Value	Units
Input Voltage Range	V _{in}	-0.3 to +13.2	Vdc
Operating Temperature	T _o	0 to +70	°C
Storage Temperature	T _{stg}	-40 to +85	°C

Recommended Operating Conditions

Rating	Symbol	Value	Units
Input Voltage	V _{in}	+6 to 13.2	Vdc

Electrical Characteristics

Unless otherwise noted V_{in} = 12.00 Volts dc and T_a = 25 °C

Characteristic	Symbol	Min	Typ	Max	Units
Input Current	I _{in}	-	.77	.91	A _{dc}
Operating Frequency	F _o	36	41	46	KHz
Minimum Output Voltage	V _{out} (min)	1400	-	-	V _{rms}
Efficiency	η	-	82	-	%
Output Current per tube	I _{out}	-	6.5	-	ma _{rms}
Output Voltage (when Powering a load simulating the referenced display)	V _{out}	-	580	-	V _{rms}
Pin3 Input Current Requirement	-	-	24	-	ma _{dc}

After tube has been allowed to warm-up for 5 minutes
External Disable Circuit shown on page 3.





Specifications subject to change without notice.




Endicott Research Group, Inc.

Typical Performance Curves

L2374

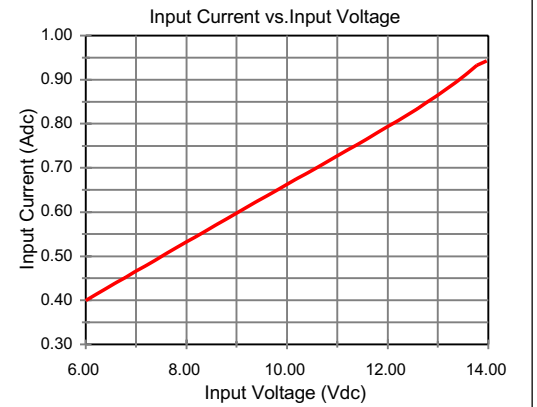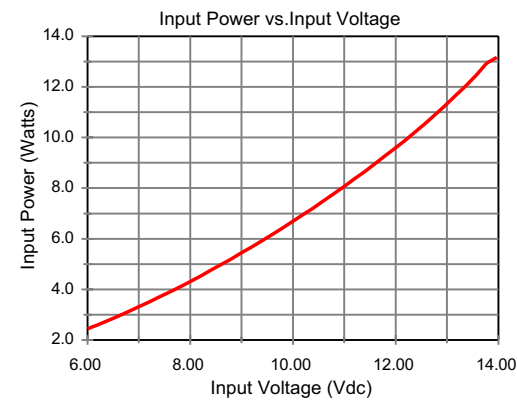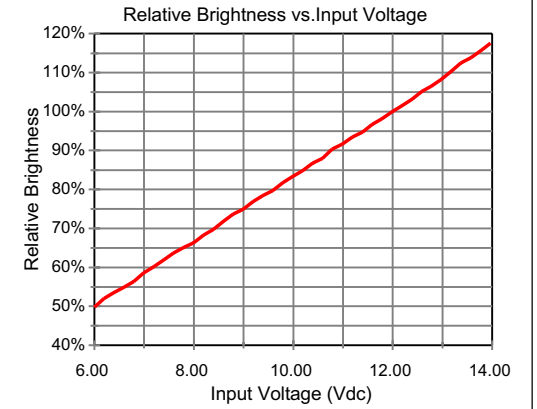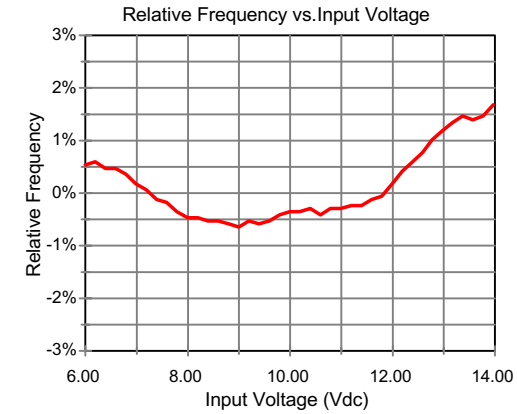

Disable Circuit

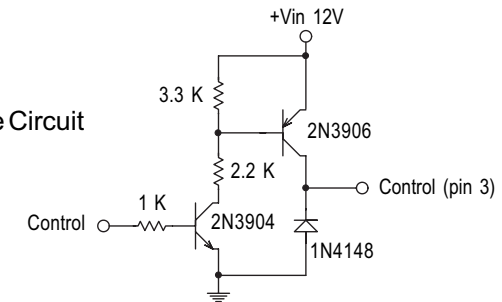

Endicott Research Group, Inc.