



Endicott Research Group, Inc.

2601 Wayne St., Endicott, NY 13760
607-754-9187 Fax 607-754-9255
<http://www.ergpower.com>

SF2R3734SHF



Specifications and Applications Information

06/09/10

Smart Force LED Backlight Unit

The ERG *Smart Force Series* of LED backlight units are specifically designed for applications which require wide dimming and LCD brightness stability. The SF2R3734SHF is designed to provide backlighting for the NEC NL10276BC16-01 display.

Designed, manufactured and supported within the USA, the SFR features:

- ✓ Custom rails for specific LCDs
- ✓ High dimming ratio
- ✓ Set of two rails: top and bottom
- ✓ One year warranty



Components are shown for reference only. Actual product may differ from that shown.

Connector


Input Connector

Molex J1
51021-0400

J1-1 Cathode 1
 J1-2 Anode 1
 J1-3 Cathode 2
 J1-4 Anode 2

Package Configuration


(shown without wires)



Top



Side



Bottom



Components are shown for reference only. Actual product may differ from that shown.

**Absolute Maximum Ratings**

Rating	Symbol	Value	Units
Forward Current ⁽¹⁾	I_F	350	mA
Pulse Forward Current ^{(1) (2)}	I_P	600	mA
Component Surface Temperature	T_s	-40 to +105	°C
Storage Temperature	T_{stg}	-40 to +100	°C

Maximum Recommended Operating Conditions ⁽³⁾

Rating	Symbol	Value	Units
Forward Current ^{(4) (5)}	I_F	200	mA
Pulse Forward Current	I_P	400	mA
Component Surface ⁽⁵⁾ Temperature	T_s	-40 to +100	°C

Electrical Characteristics

Unless otherwise noted $V_{in} = 48.00$ Volts dc and $T_a = 25^\circ\text{C}$

Characteristic	Symbol	Min	Typ	Max	Units
Number of Strings	-	-	2	-	-
LED Forward Voltage	V_F	-	2.9	3.5	V
String voltage ⁽⁶⁾	V_S	-	26.1	31.5	V

Specifications subject to change without notice.

- (1) Current is specified per string.
- (2) Maximum duty cycle is 10% for pulsed current drive, pulse width ≤ 10 ms.
- (3) Operation above maximum recommended operating conditions will require additional thermal management actions and will decrease LED lifetime.
- (4) Strings are to be driven with a current source.
- (5) Operation at or below the maximum recommended component surface temperature and forward current rating allows presumption of a 50,000 hour LED lifetime. (Lifetime is time to 70% Lumen maintenance).
- (6) Maximum V at -30°C .




Backlight Chromaticity Coordinate Boundaries ⁽¹⁾

(Ta = 25°C, I_F = 100mA)

	A	B	C	D
X	0.296	0.283	0.304	0.311
Y	0.281	0.310	0.335	0.299

(1) Each column (A, B, C and D) represents an X,Y coordinate on the CIE 1931 chromaticity diagram.

CIE 1931 CHROMATICITY DIAGRAM

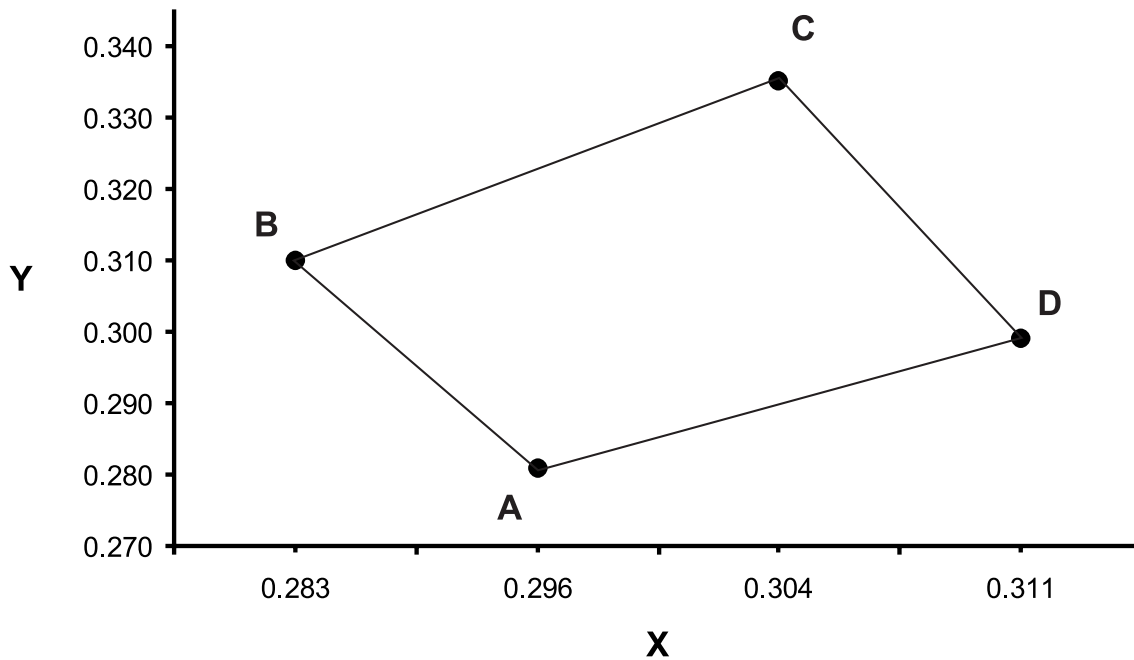

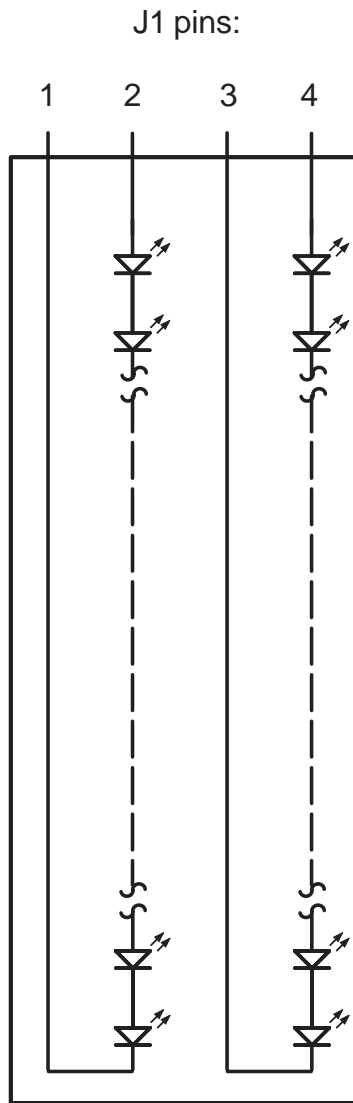


Figure 1
SFR Connectivity



Endicott Research Group, Inc. (ERG) reserves the right to make changes in circuit design and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that data sheets are current before placing orders. Information furnished by ERG is believed to be accurate and reliable. However, no responsibility is assumed by ERG for its use.