



Endicott Research Group, Inc.

2601 Wayne St., Endicott, NY 13760

607-754-9187 Fax 607-754-9255

http://www.ergpower.com

X350BF



Specifications and Applications Information

12/22/15


Smart Force LED Driver

The ERG *Smart Force Series* of LED Drivers are specifically designed for applications which require high efficiency, small footprint and LCD brightness stability from a 12 Volt dc source. The X350BF is designed to provide backlight power for NLT displays.

Designed, manufactured and supported within the USA, the X350BF features:

- ✓ Less than 5 mm in height
- ✓ Constant LED current
- ✓ Open and short circuit protection
- ✓ High efficiency
- ✓ Separate enable and dimming function
- ✓ Analog dimming function
- ✓ Soft start
- ✓ One year warranty

Package Configuration

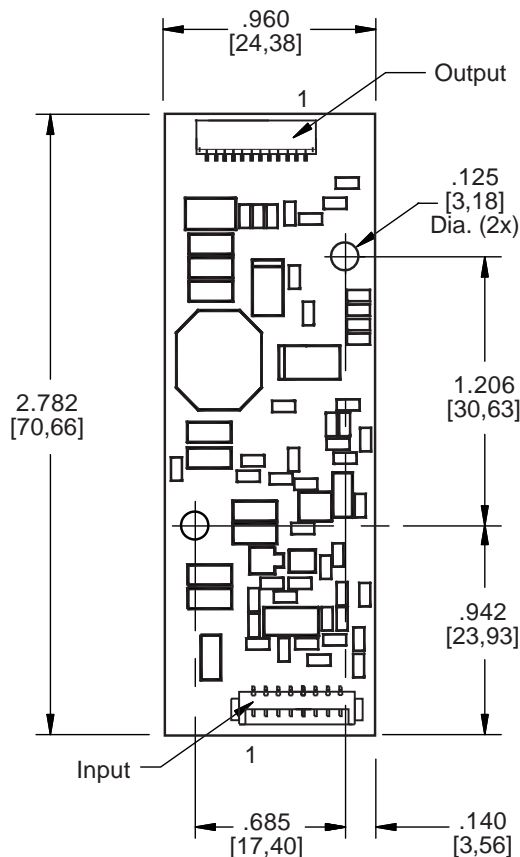

PCB components are shown for reference only. Actual product may differ from that shown.

Connectors

| Input Connector | Output Connector * |
|-------------------------------|----------------------|
| Molex 53261-0871 | JST SM12B-SRSS-TB |
| J1-1 Vin(+) | J2-1 Anode 1 |
| J1-2 Vin(+) | J2-2 Cathode 1 |
| J1-3 GND | J2-3 Anode 2 |
| J1-4 GND | J2-4 Cathode 2 |
| J1-5 Enable | J2-5 Anode 3 |
| J1-6 N/C | J2-6 Cathode 3 |
| J1-7 Control | J2-7 (do not use) |
| J1-8 Fault Indicator (output) | J2-8 (do not use) |
| | J2-9 (do not use) |
| | J2-10 (do not use) |
| | J2-11 (do not use) |
| | J2-12 (do not use) |

* Requires harness:
ERG part number HX150F recommended

Mass: 8 grams typ.



**Absolute Maximum Ratings**

| Rating | Symbol | Value | Units |
|-----------------------|--------------|-------------|-------|
| Input Voltage Range | V_{in} | -0.3 to +15 | Vdc |
| Storage Temperature | T_{stg} | -40 to +85 | °C |
| Enable Input Voltage | V_{Enable} | 0 to +5.5 | Vdc |
| Control Input Voltage | V_{PWM} | 0 to +5.5 | Vdc |
| Fault Indicator | V_{FL} | 0 to +4.0 | Vdc |

Operating Characteristics

Unless otherwise noted $V_{in} = 12.00$ Volts dc and $T_a = 25^{\circ}\text{C}$.

| Characteristic | Symbol | Min | Typ | Max | Units |
|--|--------------|-------|-------|-------|-------|
| Input Voltage | V_{in} | +10.8 | +12.0 | +13.2 | Vdc |
| Component Surface Temperature (Note 1) | T_s | -40 | - | +80 | °C |
| Input Current | I_{in} | - | 0.39 | - | Adc |
| LED String Voltage (Note 2) | V_{LED} | 15 | - | 31 | Vdc |
| Efficiency (Note 3) | η | - | 84 | - | % |
| Output Current (per string) | I_{out} | 47.9 | 50.4 | 52.9 | mAdc |
| Enable Pin (Note 4) | | | | | |
| Turn-on Threshold | V_{thon} | - | - | 2.0 | Vdc |
| Turn-off Threshold | V_{thoff} | 0.8 | - | - | Vdc |
| Enable Input Impedance (Note 5) | R_{Enable} | - | 100 | - | kOhms |
| Control Pin (Notes 6,7) | | | | | |
| Full-on Threshold | V_{thon} | - | 1.0 | - | Vdc |
| Minimum Pulse Width Threshold | V_{PWmin} | - | 5.0 | - | Vdc |
| Control Input Bias Current | I_{Cbias} | - | - | 10 | uA |
| Frequency | F_{PWM} | - | 245 | - | Hz |

(Operating Characteristics and notes are continued on next page.)



Operating Characteristics (continued)

| Characteristic | Symbol | Min | Typ | Max | Units |
|-------------------------|-----------|-----|-----|-----|-------|
| Fault Indicator | | | | | |
| No Fault Level (Note 8) | V_{NFL} | - | 3.7 | - | Vdc |
| Fault Level (Note 8) | V_{FL} | - | 0.3 | - | Vdc |

Specifications subject to change without notice.

- Note 1 Surface temperature must not exceed 80°C, except U1, which cannot exceed 105°C.
- Note 2 If maximum string voltage is exceeded, driver will enter overvoltage self protection mode and shut down. Reducing the LED string voltage then toggling the Enable and/or power cycling the driver, will restart the driver.
- Note 3 Efficiency is calculated using a 25.9V LED string.
- Note 4 If the Enable pin is floated, the driver defaults to the OFF mode.
- Note 5 Enable pin input impedance is 100kΩ to ground.
- Note 6 If the Control pin is floated while the Enable pin is active high, the driver defaults to the full ON mode.
- Note 7 Control pin input impedance is 112kΩ to ground.
- Note 8 Loading with an impedance less than 100kΩ to Vcc or to ground may cause the default levels to change.



Application Information

The ERG X350BF has been designed to be configured in multiple ways:

NO DIMMING

- OPERATION: The SFDHD can be configured to operate without dimming.
- Pins 1 and 2 of connector J1 must be connected to +Vin, between 10.8 and 13.2 Vdc. Pins 3 and 4 of connector J1 must be connected to GND.
- The Enable pin (J1-5) must be pulled up above V_{th}on.
- DISABLING DRIVER: Pulling the Enable pin (J1-5) below the minimum turn-off threshold of 0.8V or allowing the Enable pin to float, will disable the driver.

ONBOARD PWM DIMMING

- OPERATION: Onboard PWM configuration as shown in Figure 1 allows the user to control display brightness by controlling the onboard PWM generator. The user is responsible to provide an analog control signal.
- DIMMING: Dimming is accomplished by applying an analog voltage to the Control Pin (J1-7). Display brightness is modulated as shown in Graph 1.
- ENABLE/DISABLE: The driver may be enabled by applying a DC voltage to the Enable Pin(J1-5). Enable Pin on and off levels are specified in the Operating Characteristics section of the data sheet. The driver can be disabled by applying a minimum turn-off threshold of 0.8V or by allowing the Enable Pin to float.

FAULT INDICATOR


- The Fault Indicator pin (J1-8) may be used as a feedback signal that will fall below the fault level of 0.3V in the case of an open string, a shorted string, an output overvoltage condition, or an over temperature condition. If used, this pin should be loaded with a high impedance stage as specified in the Operating Characteristics. Do not drive this pin with a voltage, as it will damage the driver.



X350BF



ONBOARD PWM DIMMING

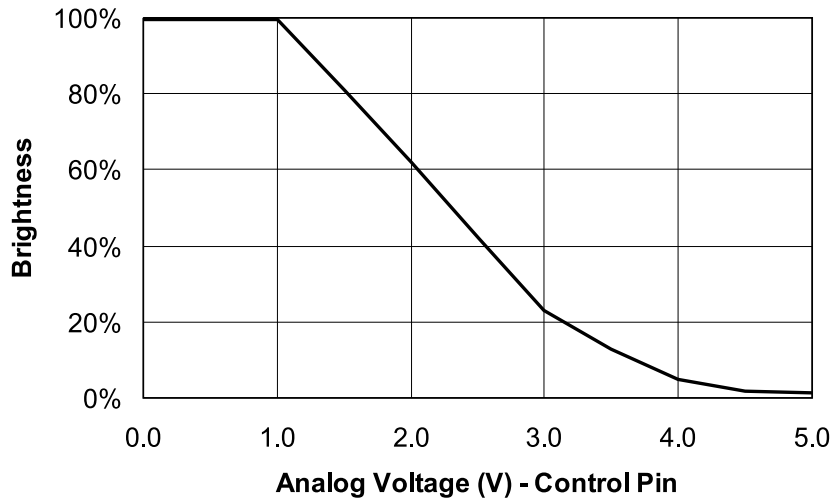

Graph 1

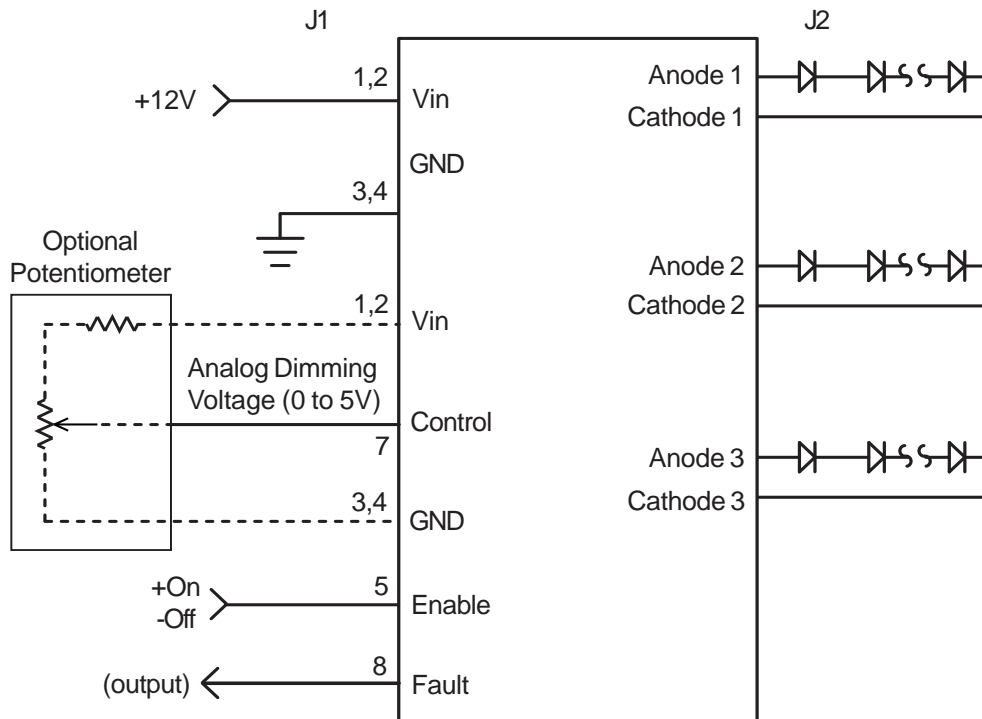


Figure 1



Endicott Research Group, Inc. (ERG) reserves the right to make changes in circuit design and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that data sheets are current before placing orders. Information furnished by ERG is believed to be accurate and reliable. However, no responsibility is assumed by ERG for its use.