



Endicott Research Group, Inc.

2601 Wayne St., Endicott, NY 13760

607-754-9187 Fax 607-754-9255

http://www.ergpower.com

# SFD2HB4387F



## Specifications and Applications Information

02/08/16


### Smart Force LED Driver

The ERG *Smart Force Series* of LED Drivers are specifically designed for applications which require high efficiency, small footprint and LCD brightness stability from a 12 Volt dc source. The SFD2HB4387F is designed to provide backlight power for the NLT NL13676BC25-03F display.

Designed, manufactured and supported within the USA, the SFD2H features:

- ✓ Less than 10 mm in height
- ✓ Constant LED current
- ✓ Open and short circuit protection
- ✓ High efficiency
- ✓ Separate enable and dimming function
- ✓ 1250:1 dimming ratio
- ✓ Soft start
- ✓ One year warranty

#### Package Configuration

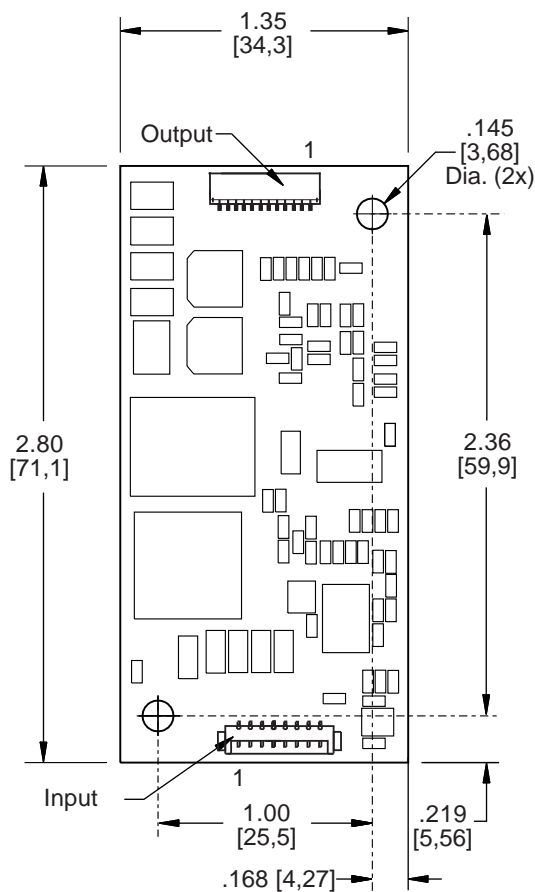

PCB components are shown for reference only. Actual product may differ from that shown.

Mass: 13 grams typ.



#### Connectors

Input Connector	Output Connector *
Molex 53261-0871	JST SM12B-SRSS-TB
J1-1 Vin(+) J1-2 Vin(+) J1-3 Vin(+) J1-4 GND J1-5 GND J1-6 GND J1-7 Enable J1-8 Control	J2-1 Cathode 1    J2-7 Anode 1 J2-2 Cathode 2    J2-8 Anode 2 J2-3 Cathode 3    J2-9 Anode 3 J2-4 Cathode 4    J2-10 Anode 4 J2-5 Cathode 5    J2-11 (do not use) J2-6 Cathode 6    J2-12 (do not use)
	* Requires harness: ERG part number H2H150F recommended

**Absolute Maximum Ratings**

Rating	Symbol	Value	Units
Input Voltage Range	$V_{in}$	-0.3 to +20	Vdc
Storage Temperature	$T_{stg}$	-40 to +85	°C
Enable Input Voltage	$V_{Enable}$	0 to +5.5	Vdc
Control Input Voltage	$V_{PWM}$	0 to +5.5	Vdc

**Operating Characteristics**

Unless otherwise noted  $V_{in} = 12.00$  Volts dc and  $T_a = 25^{\circ}\text{C}$ .

Characteristic	Symbol	Min	Typ	Max	Units
Input Voltage	$V_{in}$	+10.8	+12.0	+18.0	Vdc
Component Surface Temperature (Note 1)	$T_s$	-40	-	+80	°C
Input Current	$I_{in}$	-	1.34	-	Adc
LED String Voltage (Note 2)	$V_{LED}$	21	-	31	Vdc
Efficiency (Note 3)	$\eta$	-	90	-	%
Output Current (per string)	$I_{out}$	85	90	95	mAdc
<b>Enable Pin</b> (Note 4)					
Turn-on Threshold	$V_{thon}$	-	-	2.0	Vdc
Turn-off Threshold	$V_{thoff}$	0.4	-	-	Vdc
Enable Input Impedance (Note 5)	$R_{Enable}$	-	9	-	kOhms
<b>Control Pin</b> (Notes 6,7)					
Full-on Threshold	$V_{thon}$	-	0.5	-	Vdc
Minimum Pulse Width Threshold	$V_{PWmin}$	-	4.5	-	Vdc
Control Input Bias Current	$I_{Cbias}$	-	-	50	uA
Frequency	$F_{PWM}$	-	250	-	Hz

Specifications subject to change without notice.

(Operating Characteristics notes are continued on next page.)



- Note 1 Surface temperature must not exceed 80°C, except Q1, which cannot exceed 105°C.
- Note 2 If maximum string voltage is exceeded, driver will enter overvoltage self protection mode and shut down. Reducing the LED string voltage then toggling the Enable and/or power cycling the driver, will restart the driver.
- Note 3 Efficiency is calculated using a 26.9V LED string.
- Note 4 If the Enable pin is floated, the driver defaults to the OFF mode.
- Note 5 Enable pin input impedance is 9kΩ to ground.
- Note 6 If the Control pin is floated while the Enable pin is active high, the driver defaults to the full ON mode.
- Note 7 Control pin input impedance is 100kΩ to ground.

## Application Information

The ERG SFD2H4387F has been designed to be configured in multiple ways:

### NO DIMMING


- OPERATION: The SFD2H can be configured to operate without dimming by floating the Control (J1-8) pin.
- Pins 1, 2 and 3 of connector J1 must be connected to +Vin, between 10.8 and 18 Vdc. Pins 4, 5 and 6 of connector J1 must be connected to GND.
- Enable Pin (J1-7) must be high for the driver to be on.
- Disabling driver: Pulling the Enable Pin (J1-7) below the minimum turn-off threshold or allowing the Enable Pin to float, will disable the driver.

### ONBOARD PWM DIMMING

- OPERATION: Onboard PWM configuration as shown in Figure 1 allows the user to control display brightness by controlling the onboard PWM generator. The user is responsible to provide an analog control signal.
- DIMMING: Dimming is accomplished by applying an analog voltage to the Control Pin (J1-8). Display brightness is modulated by controlling the Control Pin voltage as shown in Graph 1 and Graph 2.
- ENABLE/DISABLE: The driver may be enabled or disabled (turned on and off) by applying a DC voltage to the Enable Pin(J1-7). Enable Pin on and off levels are specified in the Operating Characteristics section of the data sheet.
- Pins 1, 2 and 3 of connector J1 must be connected to +Vin, between 10.8 and 18 Vdc. Pins 4, 5 and 6 of connector J1 must be connected to GND.




## ONBOARD PWM DIMMING

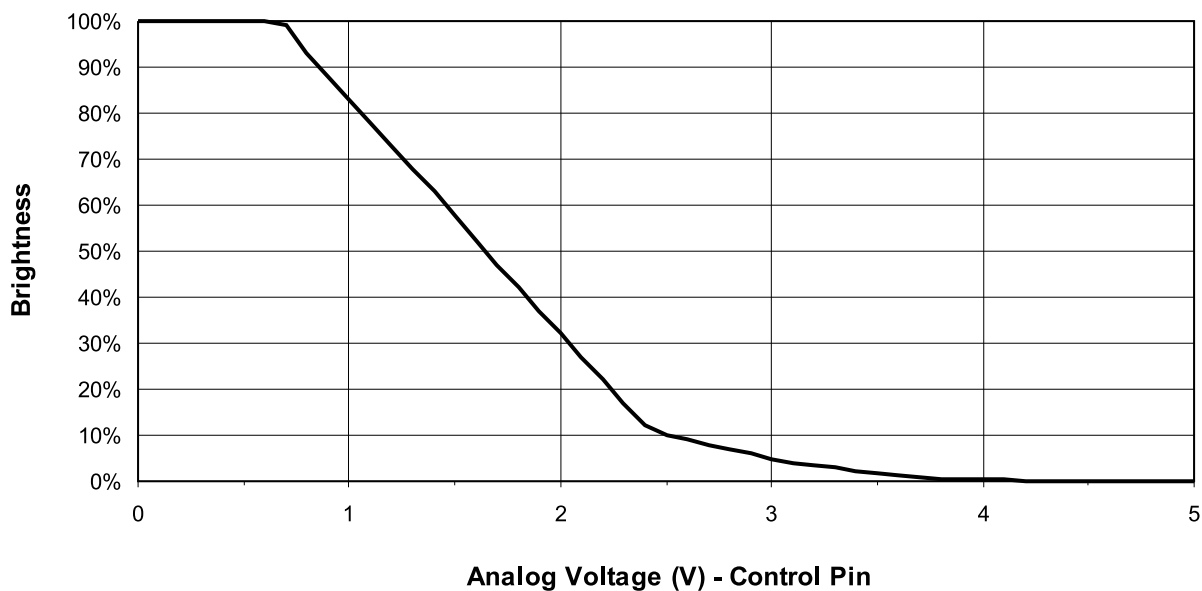

Graph 1

## EXPANDED VIEW OF ONBOARD PWM DIMMING (lower dimming region)

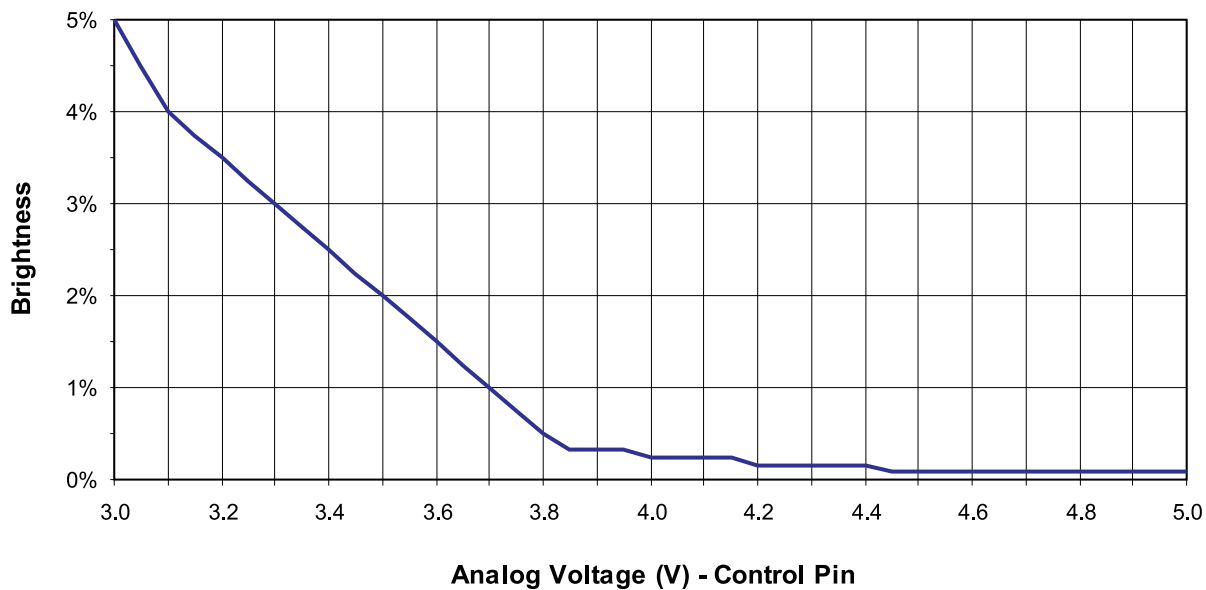

Graph 2

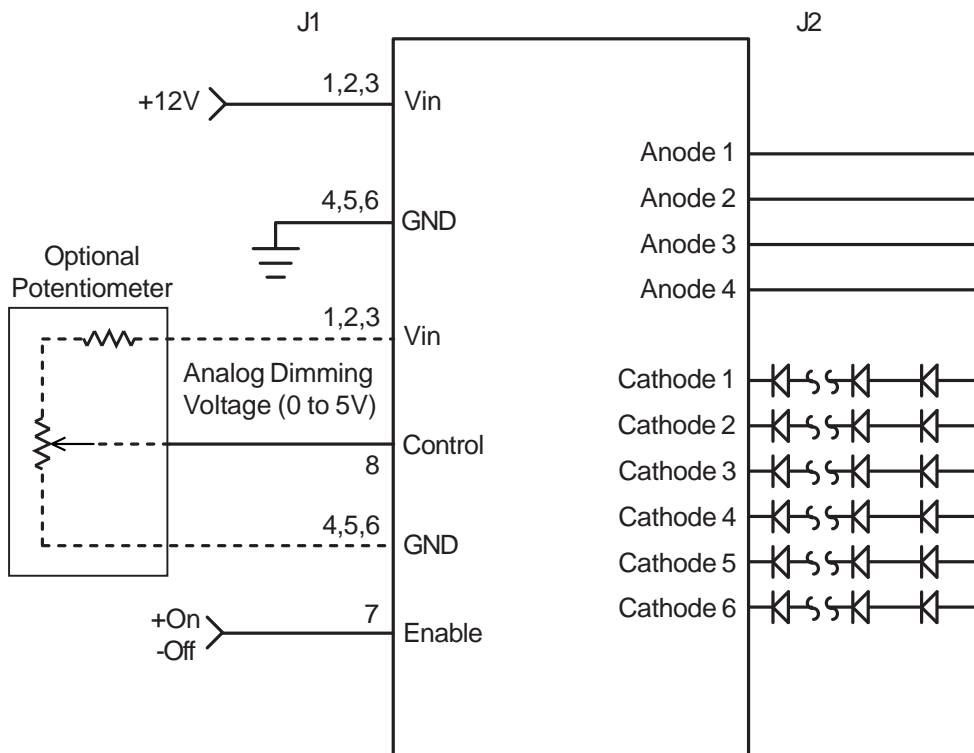


Figure 1



Endicott Research Group, Inc. (ERG) reserves the right to make changes in circuit design and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that data sheets are current before placing orders. Information furnished by ERG is believed to be accurate and reliable. However, no responsibility is assumed by ERG for its use.