



Endicott Research Group, Inc.

2601 Wayne St., Endicott, NY 13760

607-754-9187 Fax 607-754-9255

http://www.ergpower.com

# SF2R3766SHF



## Specifications and Applications Information

08/17/10

### Smart Force LED Backlight Unit

The ERG *Smart Force Series* of LED backlight units are specifically designed for applications which require wide dimming and LCD brightness stability. The SF2R3766SHF is designed to provide backlighting for the NEC NL10276BC30-18C display. When using the SFD2CB3965F driver with SF2R3766SHF rails, a brightness of 2000 cd/m<sup>2</sup> (nits) is achieved at 130 mA.

Designed, manufactured and supported within the USA, the SFR features:

- ✓ Custom rails for specific LCDs
- ✓ High dimming ratio
- ✓ Set of two rails: top and bottom
- ✓ One year warranty



Components are shown for reference only. Actual product may differ from that shown.

#### Connector


##### Input Connector

Molex J1  
51021-0400

J1-1 Cathode 1  
 J1-2 Anode 1  
 J1-3 Cathode 2  
 J1-4 Anode 2

#### Package Configuration

(shown without wires)

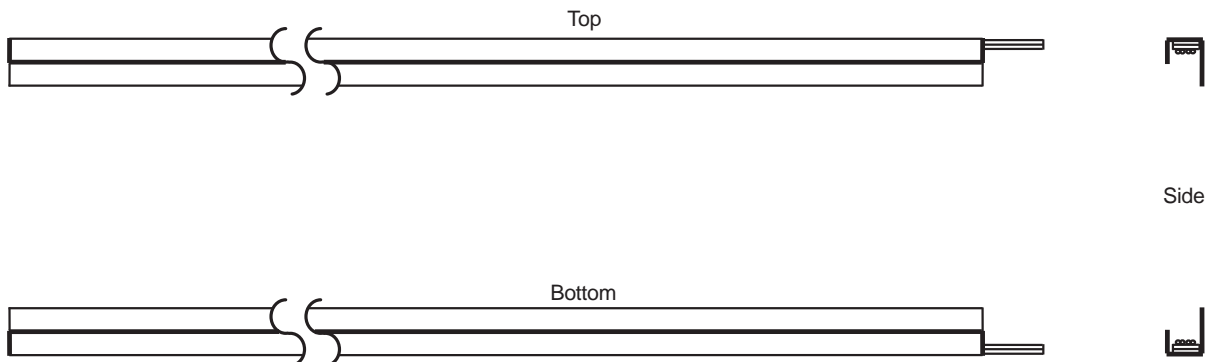

Components are shown for reference only. Actual product may differ from that shown.

**Absolute Maximum Ratings**

Rating	Symbol	Value	Units
Forward Current <sup>(1)</sup>	$I_F$	350	mA
Pulse Forward Current <sup>(1) (2)</sup>	$I_P$	600	mA
Component Surface Temperature	$T_s$	-40 to +105	°C
Storage Temperature	$T_{stg}$	-40 to +100	°C

**Maximum Recommended Operating Conditions <sup>(3)</sup>**

Rating	Symbol	Value	Units
Forward Current <sup>(4) (5)</sup>	$I_F$	200	mA
Pulse Forward Current	$I_P$	400	mA
Component Surface <sup>(5)</sup> Temperature	$T_s$	-40 to +100	°C

**Electrical Characteristics**

Unless otherwise noted  $V_{in} = 48.00$  Volts dc and  $T_a = 25^\circ\text{C}$

Characteristic	Symbol	Min	Typ	Max	Units
Number of Strings	-	-	2	-	-
LED Forward Voltage	$V_F$	-	2.9	3.5	V
String voltage <sup>(6)</sup>	$V_S$	-	46.4	56.0	V

Specifications subject to change without notice.

- (1) Current is specified per string.
- (2) Maximum duty cycle is 10% for pulsed current drive, pulse width  $\leq 10$ ms.
- (3) Operation above maximum recommended operating conditions will require additional thermal management actions and will decrease LED lifetime.
- (4) Strings are to be driven with a current source.
- (5) Operation at or below the maximum recommended component surface temperature and forward current rating allows presumption of a 50,000 hour LED lifetime. (Lifetime is time to 70% Lumen maintenance).
- (6) Maximum V at  $-30^\circ\text{C}$ .




**Backlight Chromaticity Coordinate Boundaries** <sup>(1)</sup>

(Ta = 25°C, I<sub>F</sub> = 100mA)

	A	B	C	D
X	0.296	0.283	0.304	0.311
Y	0.281	0.310	0.335	0.299

(1) Each column (A, B, C and D) represents an X,Y coordinate on the CIE 1931 chromaticity diagram.

CIE 1931 CHROMATICITY DIAGRAM

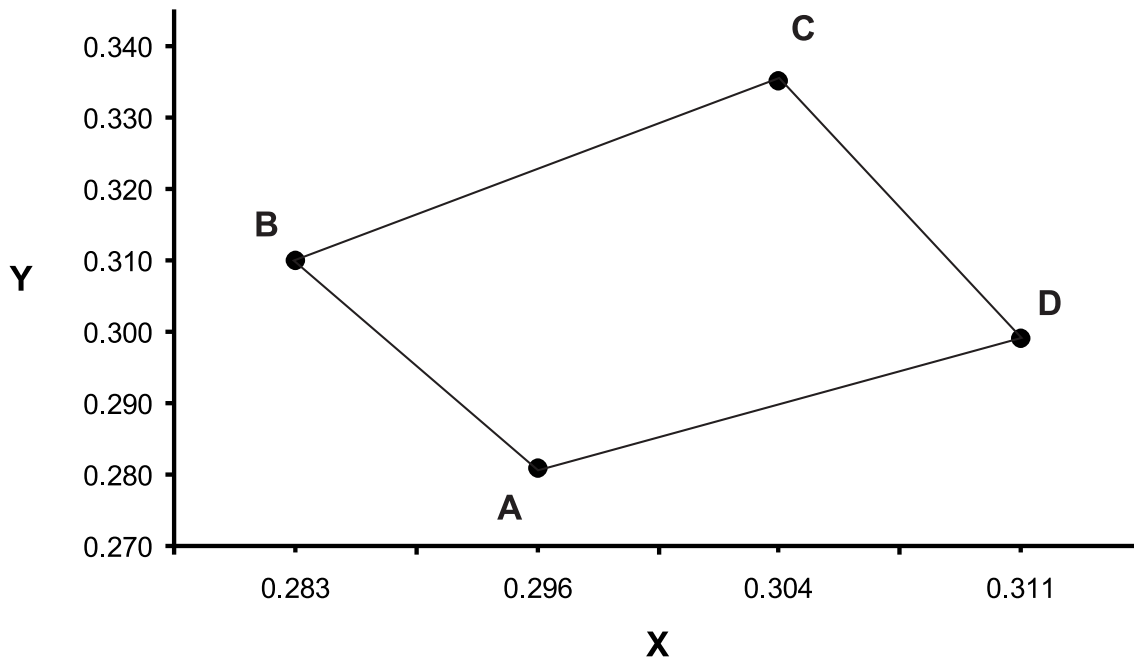

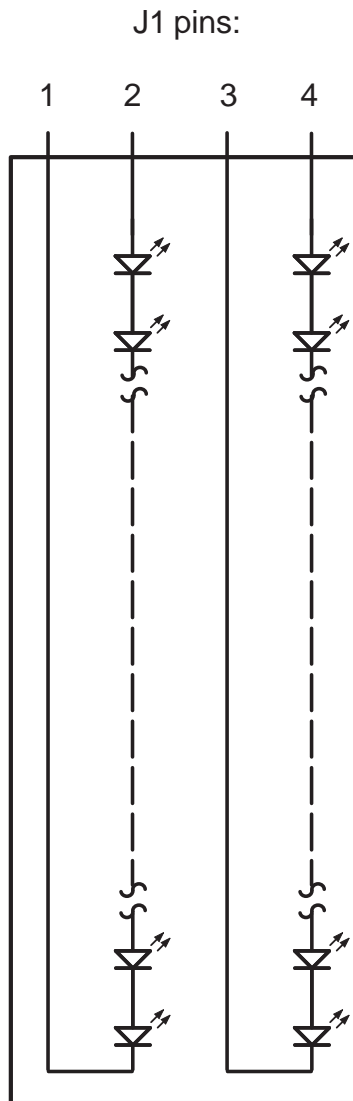


Figure 1  
SFR Connectivity



Endicott Research Group, Inc. (ERG) reserves the right to make changes in circuit design and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that data sheets are current before placing orders. Information furnished by ERG is believed to be accurate and reliable. However, no responsibility is assumed by ERG for its use.